

AD-A175 923

FURTHER STUDIES ON THE 21% THICK SUPERCRITICAL MLF

141

AIRFOIL NAE (NATIONAL (U) NATIONAL AERONAUTICAL  
ESTABLISHMENT OTTAWA (ONTARIO) M KHALID ET AL SEP 86


UNCLASSIFIED

NAE-AN-41

F/G 1/3

**Nil.**

10  
 11  
 12  
 13  
 14  
 15  
 16  
 17  
 18  
 19  
 20  
 21  
 22  
 23  
 24  
 25  
 26  
 27  
 28  
 29  
 30  
 31  
 32  
 33  
 34  
 35  
 36  
 37  
 38  
 39  
 40  
 41  
 42  
 43  
 44  
 45  
 46  
 47  
 48  
 49  
 50  
 51  
 52  
 53  
 54  
 55  
 56  
 57  
 58  
 59  
 60  
 61  
 62  
 63  
 64  
 65  
 66  
 67  
 68  
 69  
 70  
 71  
 72  
 73  
 74  
 75  
 76  
 77  
 78  
 79  
 80  
 81  
 82  
 83  
 84  
 85  
 86  
 87  
 88  
 89  
 90  
 91  
 92  
 93  
 94  
 95  
 96  
 97  
 98  
 99  
 100  
 101  
 102  
 103  
 104  
 105  
 106  
 107  
 108  
 109  
 110  
 111  
 112  
 113  
 114  
 115  
 116  
 117  
 118  
 119  
 120  
 121  
 122  
 123  
 124  
 125  
 126  
 127  
 128  
 129  
 130  
 131  
 132  
 133  
 134  
 135  
 136  
 137  
 138  
 139  
 140  
 141  
 142  
 143  
 144  
 145  
 146  
 147  
 148  
 149  
 150  
 151  
 152  
 153  
 154  
 155  
 156  
 157  
 158  
 159  
 160  
 161  
 162  
 163  
 164  
 165  
 166  
 167  
 168  
 169  
 170  
 171  
 172  
 173  
 174  
 175  
 176  
 177  
 178  
 179  
 180  
 181  
 182  
 183  
 184  
 185  
 186  
 187  
 188  
 189  
 190  
 191  
 192  
 193  
 194  
 195  
 196  
 197  
 198  
 199  
 200  
 201  
 202  
 203  
 204  
 205  
 206  
 207  
 208  
 209  
 210  
 211  
 212  
 213  
 214  
 215  
 216  
 217  
 218  
 219  
 220  
 221  
 222  
 223  
 224  
 225  
 226  
 227  
 228  
 229  
 230  
 231  
 232  
 233  
 234  
 235  
 236  
 237  
 238  
 239  
 240  
 241  
 242  
 243  
 244  
 245  
 246  
 247  
 248  
 249  
 250  
 251  
 252  
 253  
 254  
 255  
 256  
 257  
 258  
 259  
 260  
 261  
 262  
 263  
 264  
 265  
 266  
 267  
 268  
 269  
 270  
 271  
 272  
 273  
 274  
 275  
 276  
 277  
 278  
 279  
 280  
 281  
 282  
 283  
 284  
 285  
 286  
 287  
 288  
 289  
 290  
 291  
 292  
 293  
 294  
 295  
 296  
 297  
 298  
 299  
 300  
 301  
 302  
 303  
 304  
 305  
 306  
 307  
 308  
 309  
 310  
 311  
 312  
 313  
 314  
 315  
 316  
 317  
 318  
 319  
 320  
 321  
 322  
 323  
 324  
 325  
 326  
 327  
 328  
 329  
 330  
 331  
 332  
 333  
 334  
 335  
 336  
 337  
 338  
 339  
 340  
 341  
 342  
 343  
 344  
 345  
 346  
 347  
 348  
 349  
 350  
 351  
 352  
 353  
 354  
 355  
 356  
 357  
 358  
 359  
 360  
 361  
 362  
 363  
 364  
 365  
 366  
 367  
 368  
 369  
 370  
 371  
 372  
 373  
 374  
 375  
 376  
 377  
 378  
 379  
 380  
 381  
 382  
 383  
 384  
 385  
 386  
 387  
 388  
 389  
 390  
 391  
 392  
 393  
 394  
 395  
 396  
 397  
 398  
 399  
 400  
 401  
 402  
 403  
 404  
 405  
 406  
 407  
 408  
 409  
 410  
 411  
 412  
 413  
 414  
 415  
 416  
 417  
 418  
 419  
 420  
 421  
 422  
 423  
 424  
 425  
 426  
 427  
 428  
 429  
 430  
 431  
 432  
 433  
 434  
 435  
 436  
 437  
 438  
 439  
 440  
 441  
 442  
 443  
 444  
 445  
 446  
 447  
 448  
 449  
 450  
 451  
 452  
 453  
 454  
 455  
 456  
 457  
 458  
 459  
 460  
 461  
 462  
 463  
 464  
 465  
 466  
 467  
 468  
 469  
 470  
 471  
 472  
 473  
 474  
 475  
 476  
 477  
 478  
 479  
 480  
 481  
 482  
 483  
 484  
 485  
 486  
 487  
 488  
 489  
 490  
 491  
 492  
 493  
 494  
 495  
 496  
 497  
 498  
 499  
 500  
 501  
 502  
 503  
 504  
 505  
 506  
 507  
 508  
 509  
 510  
 511  
 512  
 513  
 514  
 515  
 516  
 517  
 518  
 519  
 520  
 521  
 522  
 523  
 524  
 525  
 526  
 527  
 5

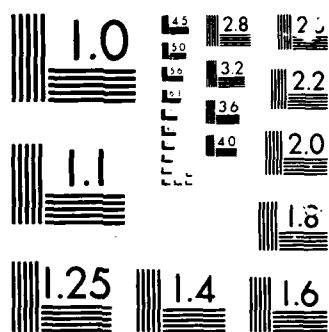

AD-A175 923

UNLIMITED  
UNCLASSIFIED

Canada

6

**FURTHER STUDIES ON  
THE 21% THICK,  
SUPERCRITICAL NLF  
AIRFOIL NAE 68-060-21:1**

by

**M. Khalid , D.J. Jones**

**National Aeronautical Establishment**

DTIC  
SELECT  
JAN 12 1987  
S  
R D

OTTAWA  
SEPTEMBER 1986

AERONAUTICAL NOTE  
NAE-AN-41  
NRC NO. 26453



National Research  
Council Canada

Conseil national  
de recherches Canada

6

UNLIMITED  
UNCLASSIFIED

**FURTHER STUDIES ON THE 21% THICK, SUPERCRITICAL  
NLF AIRFOIL NAE 68-060-21:1**

**ÉTUDES SUPPLÉMENTAIRES DU PROFIL NLF SUPERCRITIQUE  
NAE 68-060-21:1 À ÉPAISSEUR DE 21%**

by/par

M. Khalid, D.J. Jones

National Aeronautical Establishment

DTIC  
ELECTE  
JAN 1 2 1987  
S D D

OTTAWA  
SEPTEMBER 1986

AERONAUTICAL NOTE  
NAE-AN-41  
NRC NO. 26453

L.H. Ohman, Head/Chef  
High Speed Aerodynamics Laboratory/  
Laboratoire d'aérodynamique à hautes vitesses

W. Wallace  
Acting Director/  
Directeur intérimaire

### Summary

Further wind tunnel tests have been carried out on the NAE 10" chord supercritical NLF airfoil NAE 68-060-21:1. This airfoil in previous tests showed very low drag levels when free transition was allowed on the model. In the main part of the current investigation, performed at chord Reynolds number of about 7,9 and 13 million, transition was fixed at 7% and 15% on upper and lower surfaces respectively. It is observed that there is a substantial loss of lift under these conditions which appears to be associated with boundary layer thickening on the lower surface causing decambering near the trailing edge.

Also additional tests were carried out under free transition at other Reynolds numbers than those previously used. The same drag bucket behaviour near the design flow conditions was observed.

### Résumé

Des essais supplémentaires en soufflerie ont été menés avec le profil NFL supercritique NAE 68-060-21:1 à corde de 10 po. Dans les essais antérieurs, ce profil présentait de très faibles traînées quand on réalisait sur la maquette les conditions de transition libre. Dans les travaux principaux de l'étude en cours, effectués avec un nombre de Reynolds à la corde d'environ 7,9 et 13 millions, la transition a été fixée à 7% et 15% respectivement pour l'extrados et l'intrados. On a constaté qu'il se produit une perte substantielle de portance dans ces conditions, qui semble associée à un épaississement de la couche limite sur l'intrados provoquant un décollement près du bord de fuite.

D'autres essais ont été menés en transition libre avec des nombres de Reynolds différents. Le même phénomène de chute de la traînée au voisinage des conditions théoriques d'écoulement a été observé.



Accession For	
NTIS CRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution /	
Availability Codes	
Dist	Avail and/or Special
A-1	

<u>Contents</u>	<u>Page</u>
Summary	iii
Symbols	vii
1.0 Introduction	1
2.0 Investigation of Transition Strip Height	2
3.0 Discussion of Results	3
3.1 $C_L - \alpha$ and $C_M - \alpha$	3
3.2 Reynolds Number Effect on $C_L - \alpha$	5
3.3 Pressure Distributions at Different Spanwise Locations	5
3.4 Effect of Transition on Drag	7
4.0 Conclusions	7
5.0 References	8

## Illustrations

### Figure

- 1a. Comparison of  $C_L - \alpha$  and  $C_M - \alpha$  for Fixed and Free Transition
- 1b. Comparison of  $C_L - \alpha$  and  $C_M - \alpha$  at  $M_\infty = 0.60$ ,  $R_c = 6.75 \times 10^6$
- 2a. Pressure Distributions for Free and Fixed Transition at  $M_\infty = 0.7$ ,  
 $R_c = 6.8 \times 10^6$
- 2b. Pressure Distributions for Free and Fixed Transition at  $M_\infty = 0.7$ ,  
 $R_c = 6.8 \times 10^6$
3. A Sketch of the 21%  $\frac{t}{c}$  Airfoil NAE 68-060-21:1
- 4a. BGK Computations to Compare Fixed and Free Transition.  
 $M_\infty = 0.68$ ,  $R_c = 6.8 \times 10^6$
- 4b. BGK Calculation of  $\delta^*$  versus  $x/c$ .  $M_\infty = 0.68$ ,  $R_c = 6.8 \times 10^6$ ,  
 $\alpha = 0^\circ$
- 5a.  $C_L - \alpha$  with Free Transition.  $M_\infty = 0.68$
- 5b.  $C_L - \alpha$  with Fixed Transition.  $M_\infty = 0.68$
6. Effect of Reynolds Number on  $C_p$  with Fixed Transition
7. BGK Computations to Show Reynolds Number Effect when Transition  
Fixed.  $M_\infty = 0.68$ ,  $\alpha = 0^\circ$
8. The Two Spanwise Locations of Pressure Tappings.
- 9a-9c Pressure Variation at Two Spanwise Locations.
10. Effect of Transition on Drag Values
- 11a.  $C_{D_W}$  versus  $M_\infty$  for  $C_L = 0.6$

Illustrations (Cont'd)Figure

11b.  $C_{D_W}$  versus  $M_\infty$  for  $C_L = 0.7$

12. Drag Comparisons with Other Airfoils

Symbols

<u>Symbol</u>	<u>Definition</u>
$c$	chord length
$C_{D_W}$	wake drag
$C_L$	lift coefficient
$C_M$	pitching moment about quarter chord, negative nose down
$C_p$	pressure coefficient
$H$	shape parameter
$M_\infty$	Mach number (wind tunnel free stream corrected for wall interference)
$R_c$	Reynolds number based on chord length (10 in. for NAE 68-060-21:1)
$t/c$	maximum thickness to chord ratio
$x/c$	relative distance along airfoil chord
$\alpha$	angle of attack (corrected for wall interference)
$\delta^*$	boundary layer displacement thickness

## Subscripts

$\infty$	free stream
$p$	integrated from airfoil pressures

## 1.0 Introduction

In the continuing investigation of the NLF airfoils designed and tested jointly by NAE and de Havilland\* we present here further studies on the 21% airfoil NAE 68-060-21:1. A previous report [1] has dealt with the case of free transition on this airfoil. It was shown that the airfoil behaved extremely well under this condition and yielded drag levels far below any previously tested airfoil at NAE. In fact the drag levels at supercritical Mach numbers are comparable with drag at low Mach numbers for the NACA 63, 64 and 65 series airfoils (about 50 counts) as shown in Ref. 2. This low drag was accounted for by there being long runs of laminar flow on both upper and lower surfaces.

In a similar study on an NLF 16% airfoil (Ref. 2 and 3), it was shown that this airfoil also displayed excellent drag characteristics. In Ref. 3 a study was made of the effect of fixing transition on the 16% airfoil. This study indicated that  $C_L - \alpha$  changed significantly at the lowest Reynolds number tested,  $R_c = 8 \times 10^6$ , i.e.  $\Delta C_L$  of about 0.1, with fixed transition giving lower lift. However at the higher chord Reynolds numbers of  $14$  and  $20 \times 10^6$  the differences in  $C_L - \alpha$  were very small.

In the present study we also find a significant loss of lift due to transition fixing at all Reynolds numbers ranging from 0.2 at  $6.8 \times 10^6$  to 0.1 at  $12.8 \times 10^6$ . This loss is also indicated theoretically using the BGK [4] code. It seems to be accounted for by the thicker boundary layer in the fixed transition case. This is

---

\*with support from NRC PILP project CA155-1-0655/252

particularly noticeable on the lower surface where the cove region is filled in by the boundary layer thus decambering the trailing edge region and so reducing overall lift.

This report, in addition to investigating fixed transition, also presents further results with free transition at  $R_c = 9.2$  and  $20.1 \times 10^6$ . This data supplements earlier data at  $R_c = 6.8, 12.8$  and  $16.7 \times 10^6$ . A later section looks at the effect of the pressure holes in causing turbulence and in changing boundary layer characteristics.

## 2.0 Investigation of Transition Strip Height

Before analysing the fixed transition results we wanted to be sure that the NAE method of transition strip application was not adversely affecting performance due, for instance, to too high a step at the transition location. In order to investigate this we compared the NAE method of application with another method, normally used by de Havilland, and measured the height of the grit roughness. This was done on a flat metal plate to simulate airfoil applications in the wind tunnel.

In the first (NAE) method the strip area (2 mm wide) is sprayed with lacquer from a distance of about two feet. The 320 grit carborundum powder is then blown over the strip area from a sheet of paper to give a coverage of about 10%. In the second method the strip surface is wetted with a single stroke of a clean brush dipped in a mixture of 1/3 lacquer, 1/3 thinner and 1/3 retarder. The carborundum granules are then deposited in the same way as in the first method.

The height of each strip was then measured by running the spherical indicator of a surface gauge with a sensitivity of 0.0005 in., along the lengths of the strips. The strip from the NAE method was from 0 to 0.0005 in thickness compared to 0.001 to 0.0015 for the second (brushing) method. Thus it seems that the NAE method of transition fixing is quite acceptable. It is also well in line with established practice, see Ref. 5.

The transition strips were applied at 7% chord on the upper surface and at 15% chord on the lower surface using 320 carborundum grit.

### 3.0 Discussion of Results

#### 3.1 $C_L - \alpha$ and $C_M - \alpha$

In Figs. 1a and 1b we show typical  $C_L - \alpha$  and  $C_M - \alpha$  curves for  $R_c = 6.75 \times 10^6$  and  $M_\infty = 0.68, 0.70$  and  $0.6$ . The difference in lift and pitching moment between free and fixed transition is seen to be quite substantial. For instance the lift difference is about 0.2, for  $M_\infty = 0.68$  and  $0.70$  over most of the  $\alpha$  range with  $\frac{\partial C_L}{\partial \alpha}$  remaining fairly constant in both cases at about 0.17. Also the pitching moment magnitude is much reduced when the transition strip is applied. This loss of lift is similar to the 0.1 loss in lift on a 16% t/c NLF airfoil at  $R_c = 8 \times 10^6$  [3]. However at  $R_c = 14 \times 10^6$  there was no significant loss in lift for the 16% foil.

The explanation seems to be that the growth of the tripped turbulent boundary layer in the adverse pressure gradient region aft of

50% chord has the effect of decambering the airfoil. This effect is reflected in the pressure distributions presented in Figs. 2a and 2b. Note in particular the smaller pressure gradient aft of 60% chord on the lower surface for the 'tripped' case compared to the 'free' case. In the free transition case the flow on the lower surface is probably laminar up to 40% chord and the turbulent boundary layer will be much thinner and so decamber the airfoil to a lesser degree. Looking at Fig. 3 we can see that 60% chord on the lower surface is just after a cove region has been entered; it is here where the large thickening of the boundary layer occurs.

This large difference in  $C_L - \alpha$  is also noticed theoretically. Calculations using the BGK code [4] with Green's lag entrainment boundary layer method indicates a loss of lift of about 0.3 (Fig. 4a) which is somewhat bigger than the experimental difference. Transition in the 'free' case occurred at the pressure minima. Figure 4a also shows the shape parameter  $H$  in the 'fixed' case which is used to indicate separation and  $H = 2.5$  is usually taken as the cut off point for separated flow. It can be seen that  $H$  on the lower surface increases rapidly at about 60% chord rising to a value of about 2.3 at which value it stays fairly constant to 90% chord. This region of high  $H$  is also the region where the boundary layer growth is most pronounced, thus inducing a decambering effect on the airfoil. This in turn reduces the overall lift as well as the pitching moment. On Fig. 4b we show the displacement thickness  $\delta^*$  versus distance along the foil. It can be seen that the decambering effect will be much larger in the fixed transition case than for free transition. This seems to be the key factor in accounting for the loss of lift.

### 3.2 Reynolds Number Effect on $C_L - \alpha$

It can be seen from Fig. 5a that the Reynolds number effect on  $C_L - \alpha$  is very small in the free transition case indicating that the boundary layer growth is not significantly different at the various Reynolds numbers (except, unexplainably, at  $R_c = 16.7 \times 10^6$ ). On the other hand, with fixed transition, Fig. 5b shows a substantial difference in lift at constant  $\alpha$ , with an increase of about 0.05 as the chord Reynolds number increases from 6.8 to 9.2 million and from 9.2 to 12.8 million. This behaviour indicates that the boundary layer is getting thicker as expected with decreasing Reynolds number. Pressure plots (Fig. 6) substantiate this as the pressure gradients are smaller aft of 60% on the lower surface for the lower Reynolds number.

The same behaviour of increased lift with higher Reynolds number is observed theoretically. Figure 7 shows the difference in pressure distribution and the corresponding difference in lift. This amounts to about 0.07 which is very close to the experimental difference.

In the free transition theoretical case, to compare to the experiment of Fig. 5a, we were unable to produce the same difference in lift (about zero except for  $R_c = 16.7 \times 10^6$ ) for various Reynolds numbers. In fact theoretically the lift increased from 0.74 to 0.80 for  $M_\infty = 0.68$  and  $R_c = 6.8$  and  $12.8 \times 10^6$  respectively with  $\alpha = 0^\circ$ .

### 3.3 Pressure Distribution at Different Spanwise Locations

Note that the free transition pressure distributions shown in the previous figures do not seem to be affected by the turbulence caused by the presence of the pressure holes themselves in that the lift coefficient is much larger for instance much larger aft lift than in

the transition fixed case. Although the line of pressure holes creates a turbulent strip within an otherwise predominantly laminar flow, its effect on the boundary layer behaviour must be negligible. In order to observe differences in pressures, if any, in the turbulent strip caused by the pressure holes (at  $y = -1.75$  inches, see Fig. 8) and pressures elsewhere on the body, an extra set of upper and lower surface tappings were placed at spanwise location  $y = +1.75$  inches. This second set was placed aft of 60% chord and thus was preceded by almost completely laminar flow. Hence we expected to see some differences in pressure readings. Our observations however were inconclusive. For instance Fig. 9a ( $M_\infty = 0.68$ ,  $R_c = 12.6 \times 10^6$ ,  $C_{L_p} = 0.599$ ) shows a trend of the sort of behaviour we had expected with more aft end lift indicated for the section preceded by laminar flow. However Fig. 9b ( $M_\infty = 0.68$ ,  $R_c = 9.3 \times 10^6$ ,  $C_{L_p} = 0.603$ ) shows almost perfect agreement especially on the lower surface while Fig. 9c ( $M_\infty = 0.68$ ,  $R_c = 6.8 \times 10^6$ ,  $C_{L_p} = 0.590$ ) shows less aft lift.

As can be seen these pressure differences at the two spanwise locations are quite small and indicate to the authors that the full line of pressure tappings gives a good representation of pressures in the laminar part of the flow. This would explain the good matching of pressure integrated lift to balance lift. Note however that although the pressure distribution and hence local lift are not affected by the pressure holes the drag measured directly behind a line of pressure holes is distinctly higher than drag measurements taken behind a clean part of the airfoil (see Ref. 1).

This small effect on the local boundary layer growth by the tappings must be due to 'side relief' from the laminar regions on each side of the turbulent strip in contrast to the 'tripped' case where there is no 'side relief'.

### 3.4 Effect of Transition on Drag

As expected, the drag levels for the same lift are much higher with fixed transition than with free transition. As shown in Fig. 10 the typical increase is about 80 drag counts.

We show on Figs. 11a and 11b the drag levels for a large range of Reynolds numbers. These include new data from recent tests (April 86) for  $R_c = 9.2$  and 20.1 million with free transition which supplement the earlier data mentioned in Ref. 1.

Figure 12 shows the present transition free and transition fixed data for  $C_L = 0.6$  plotted as  $C_{D_w}$  versus  $t/c$ . Also shown are the data for a number of other airfoils tested in the NAE 2D facility. The integers adjacent to symbols for the accessory data correspond to Mach numbers. The transition fixed data appears consistent with other airfoil data giving drag values about 30 drag counts above Hoerner's low speed values [6].

### 4.0 Conclusions

It has been demonstrated that fixing transition at 7% and 15% chord on the upper and lower surfaces respectively has a significant detrimental effect on the performance of the NLF airfoil

NAE 68-060-21:1. Lift, pitching moment and drag are all significantly altered by this fixing of transition.

The drag level with fixed transition appears quite consistent with that of other (free transition) airfoils tested at NAE. With free transition on the 21% remarkably low drag values are obtained near the design conditions as already noted in previous work (Ref. 1).

#### 5.0 References

1. Jones, D.J., Khalid, M. Analysis of Experimental Data for a 21% Thick Natural Laminar Flow Airfoil, NAE 68-060-21:1. National Research Council Report NAE-AN-34, Oct. 1985.
2. Eggleston, B., Jones, D.J., Poole, R.J.D., Khalid, M. Thick Supercritical Airfoils with Low Drag and NLF Capability. ICAS Proceedings, Sept. 1986 (to be published).
3. Eggleston, B. A Review of Tests of Thick Low Drag Supercritical Airfoil. de Havilland of Canada Report DHC-PILP-85-2. (Company Confidential).
4. Bauer, F., Garabedian, P. and Korn, D. Supercritical Wing Sections III. Lecture Notes in Economics and Mathematical Systems No. 150. Springer-Verlag 1977.
5. Braslow A.L. and Knox E.C. Simplified Method for Determination of Critical Height of Distributed Roughness Particles for Boundary Layer Transition at Mach Numbers from 0 to 5. NACA TN-4363, Sept. 1958.
6. Hoerner, S.F. Fluid Dynamic Drag. 1965.

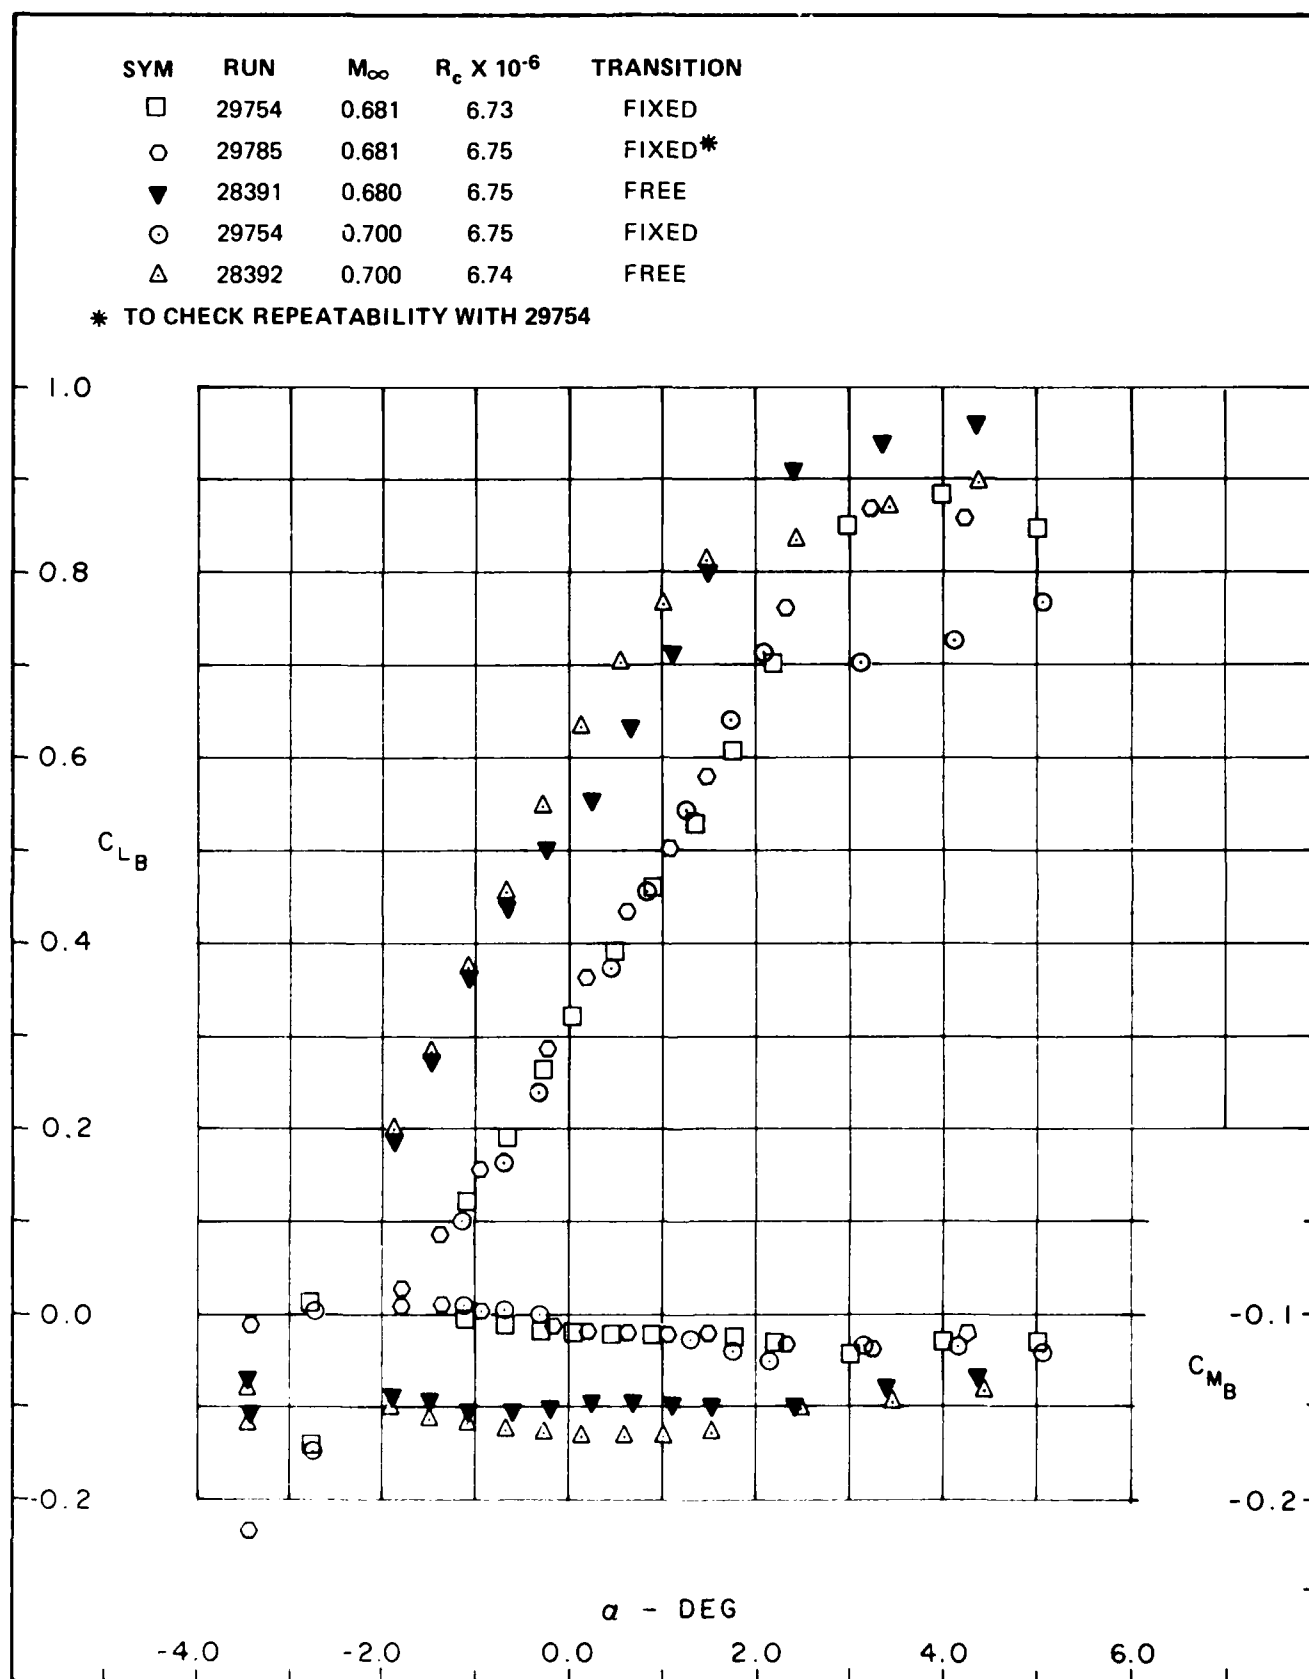


FIG. 1a: COMPARISON OF  $C_L - \alpha$  AND  $C_M - \alpha$  FOR FIXED AND FREE TRANSITION

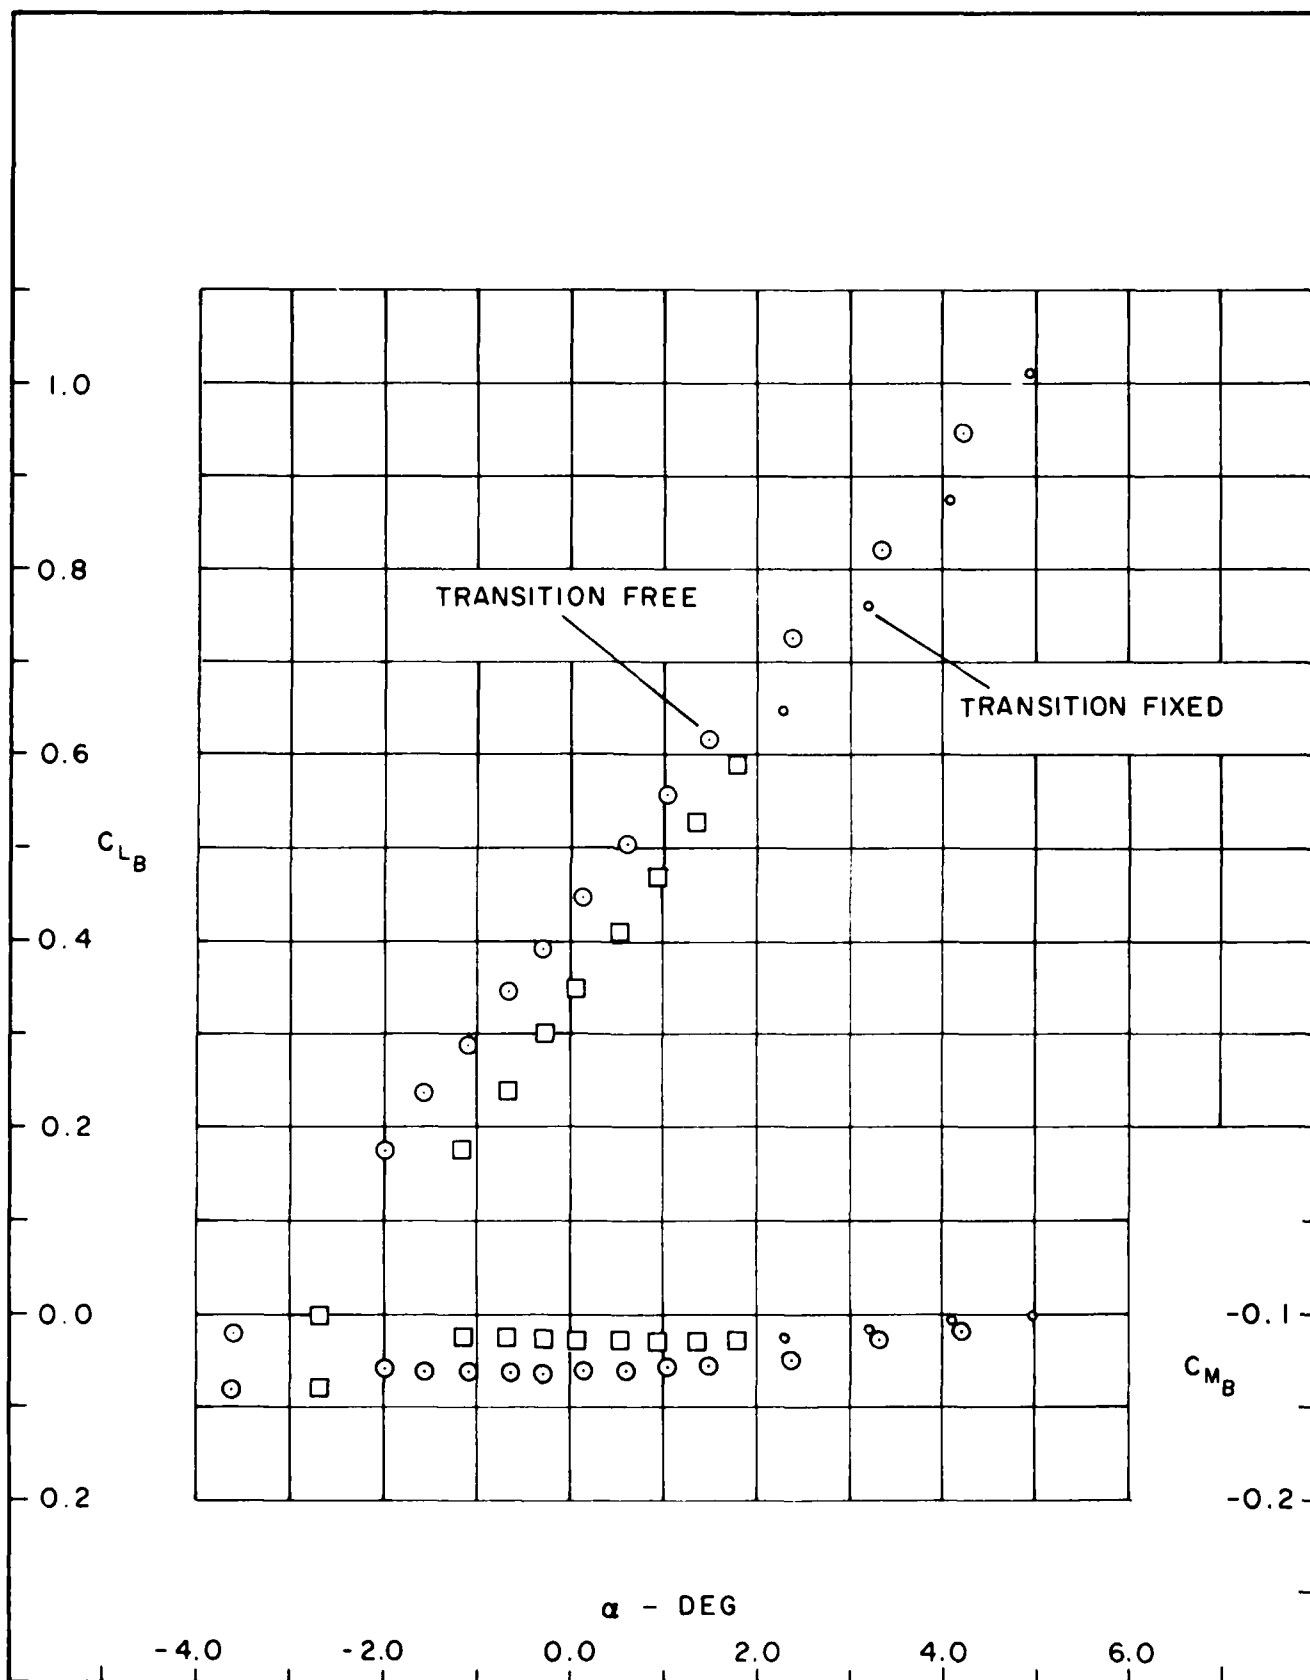


FIG. 1b: COMPARISON OF  $C_L - \alpha$  AND  $C_M - \alpha$  AT  $M_\infty = 0.60$ ,  $R_c = 6.75 \times 10^6$

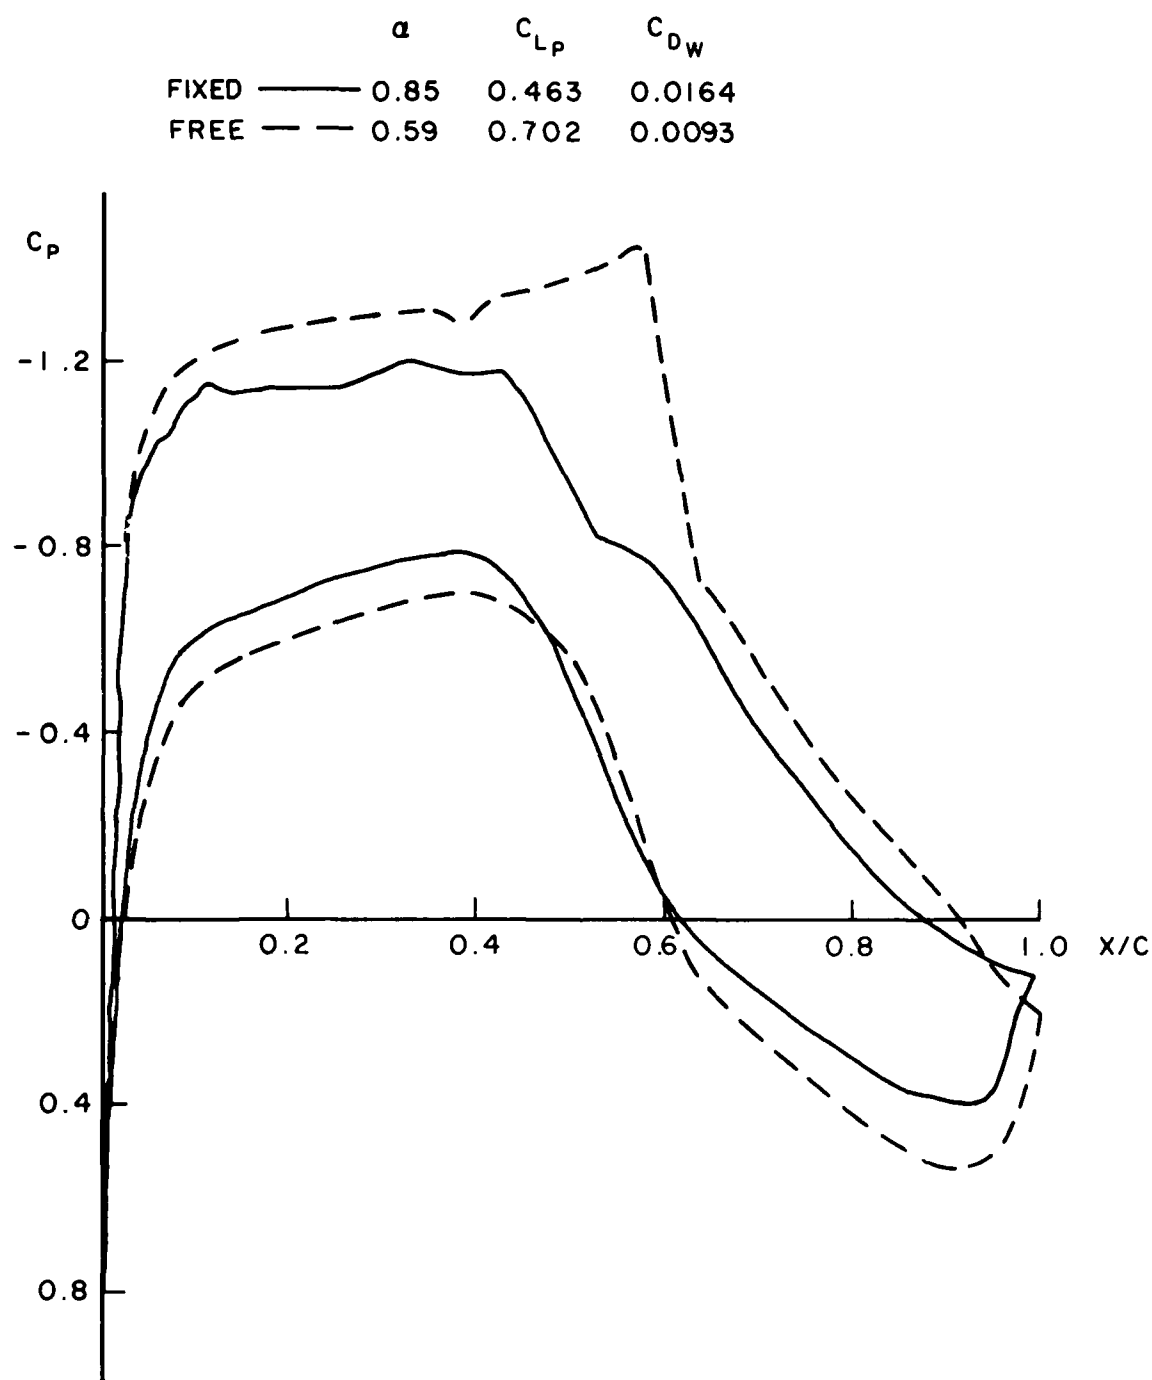


FIG. 2a: PRESSURE DISTRIBUTIONS FOR FREE AND FIXED TRANSITION AT  
 $M_\infty = 0.7, R_c = 6.8 \times 10^6$

	$\alpha$	$C_{Lp}$	$C_{Dw}$
FIXED —	-0.32	0.236	0.0181
FREE - -	-0.27	0.546	0.0060

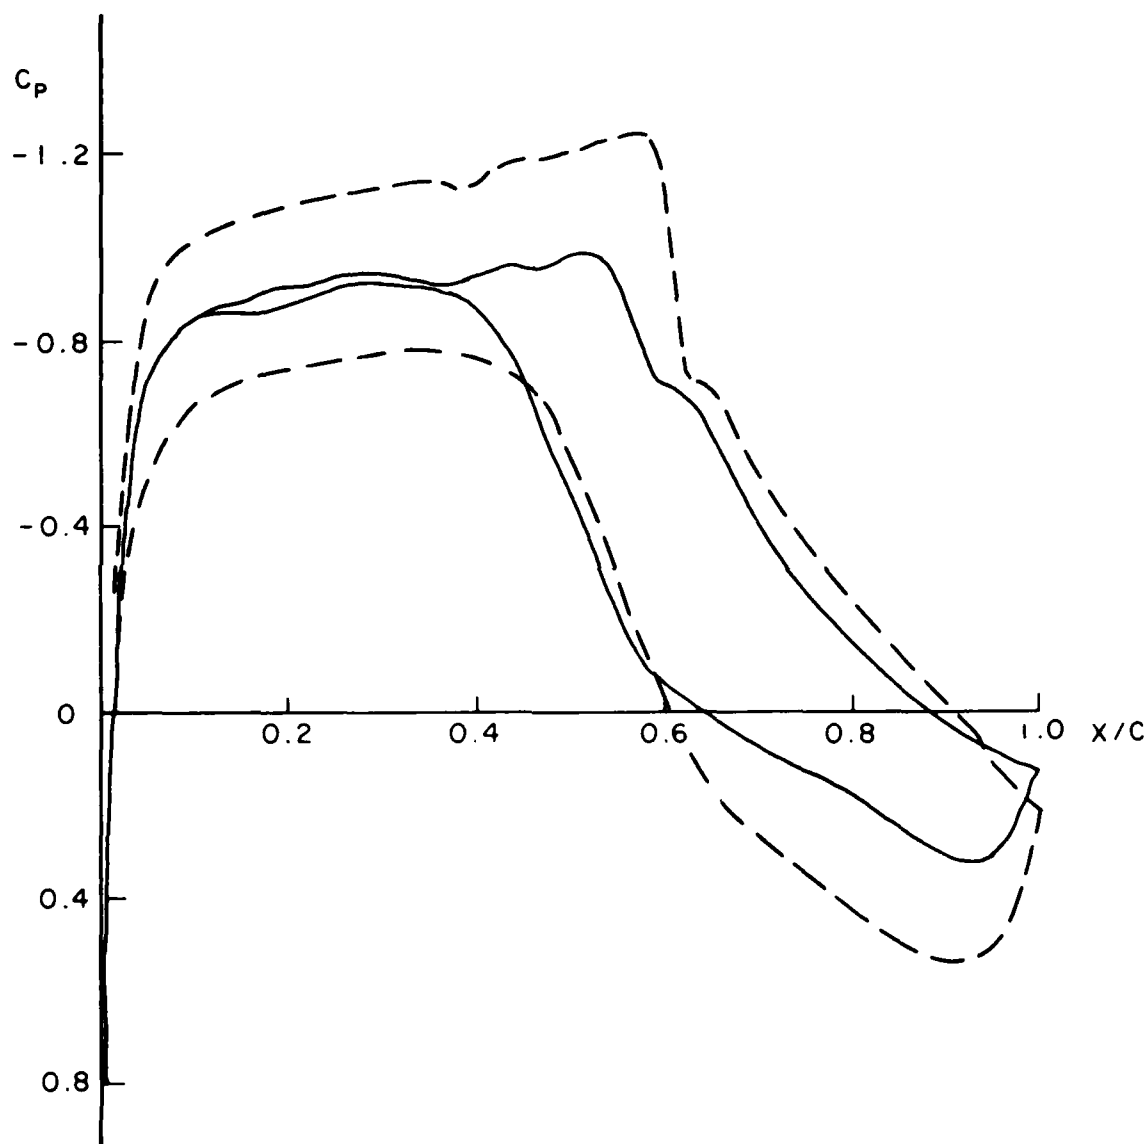


FIG. 2b: PRESSURE DISTRIBUTIONS FOR FREE AND FIXED TRANSITION AT  
 $M_\infty = 0.7, R_c = 6.8 \times 10^6$

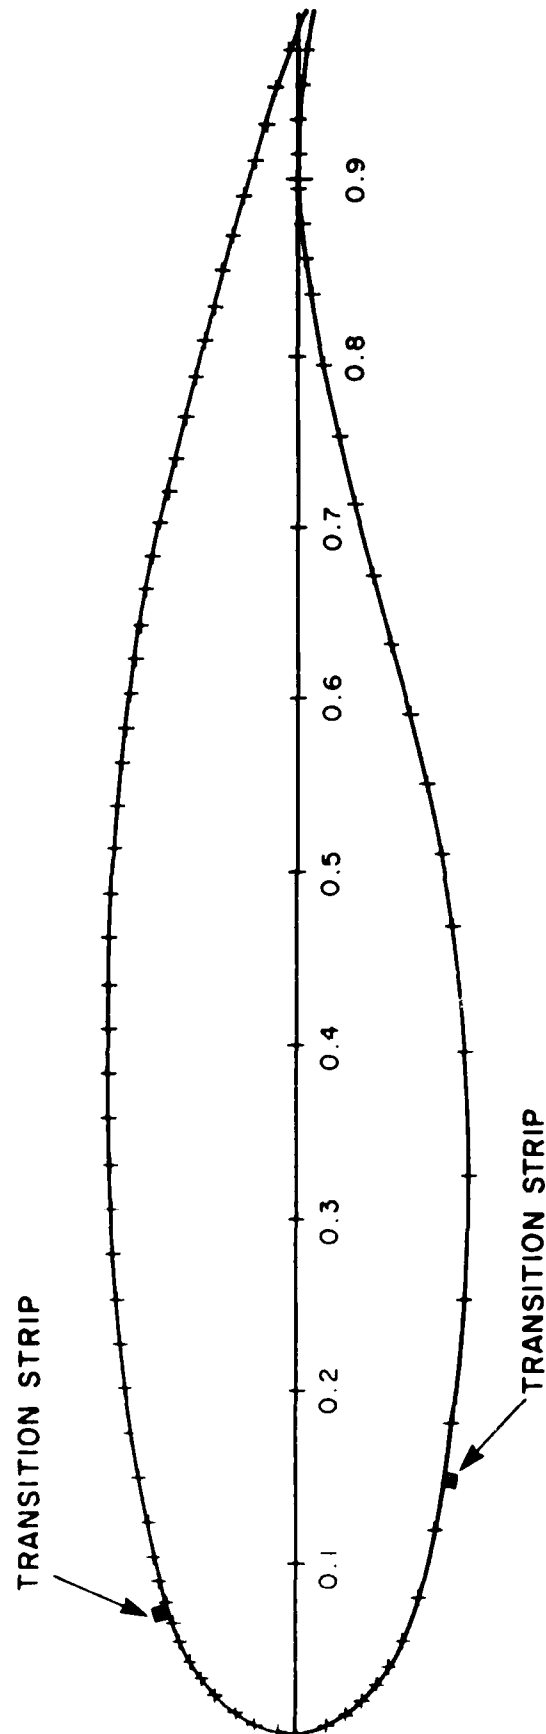


FIG. 3: A SKETCH OF THE 21%  $t/c$  AIRFOIL NAE 68-060-21:1

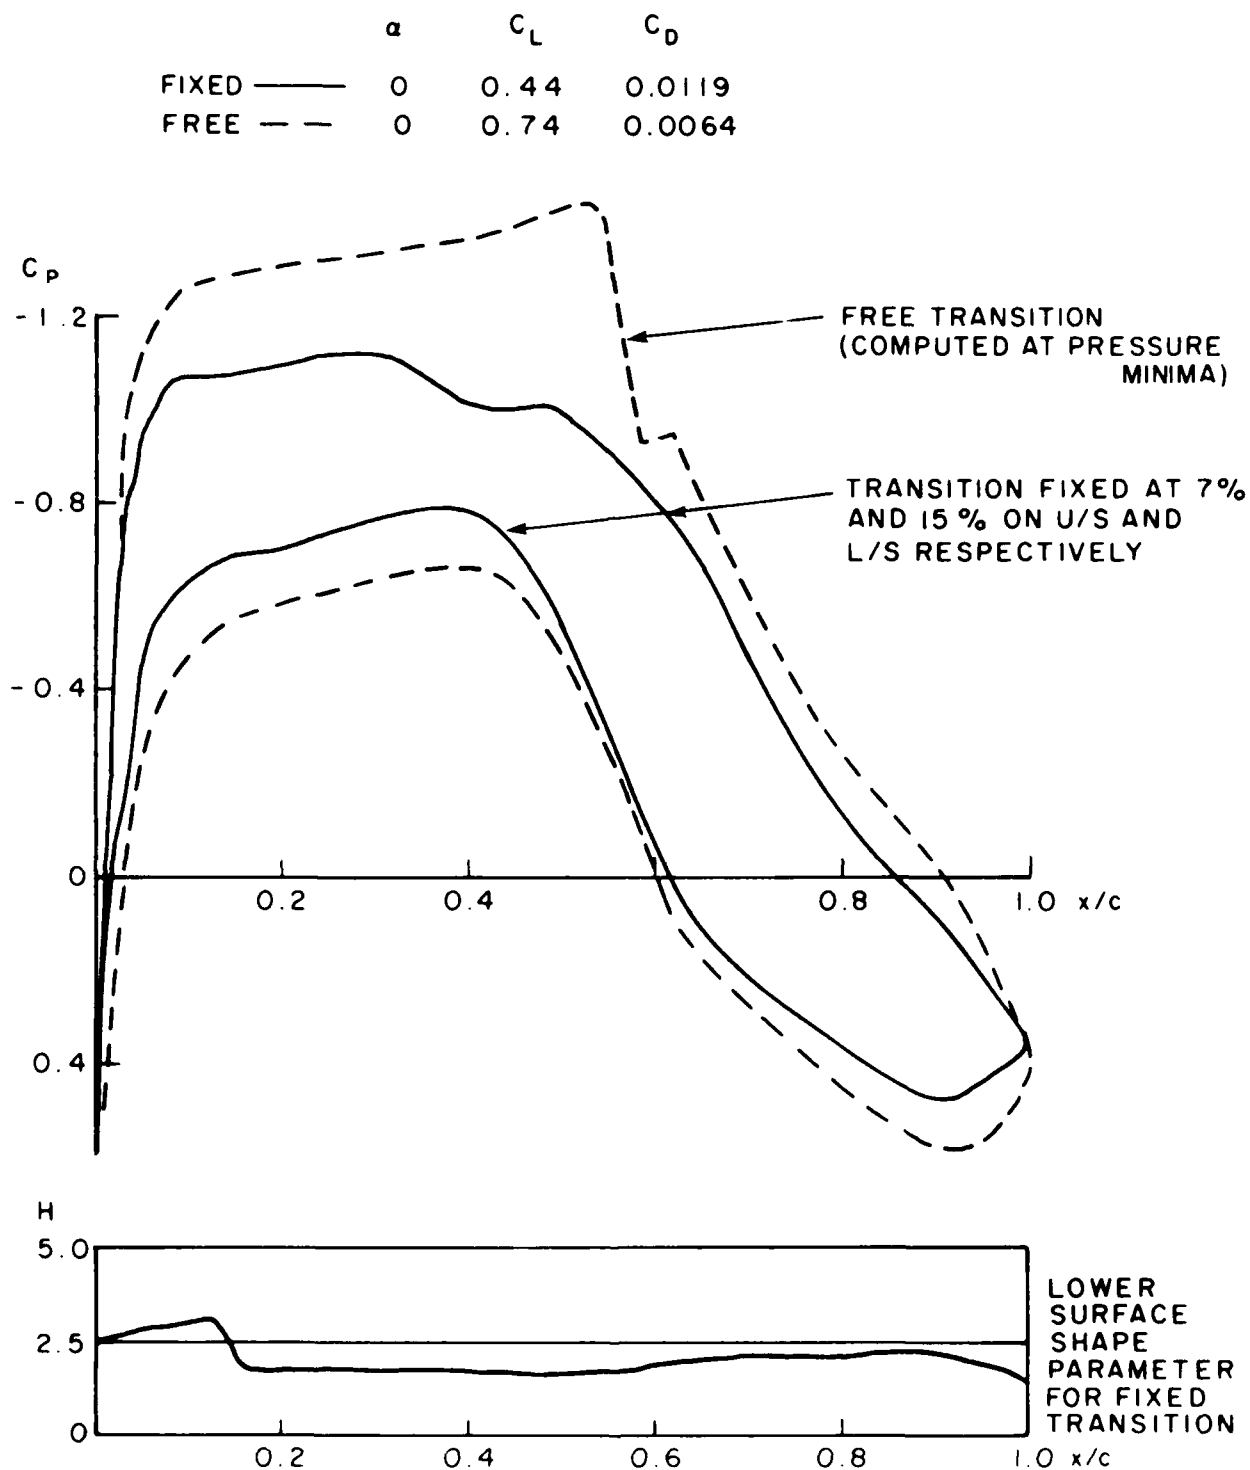


FIG. 4a: BGK COMPUTATIONS TO COMPARE FIXED AND FREE TRANSITION  
 $M_\infty = 0.68, R_c = 6.8 \times 10^6$

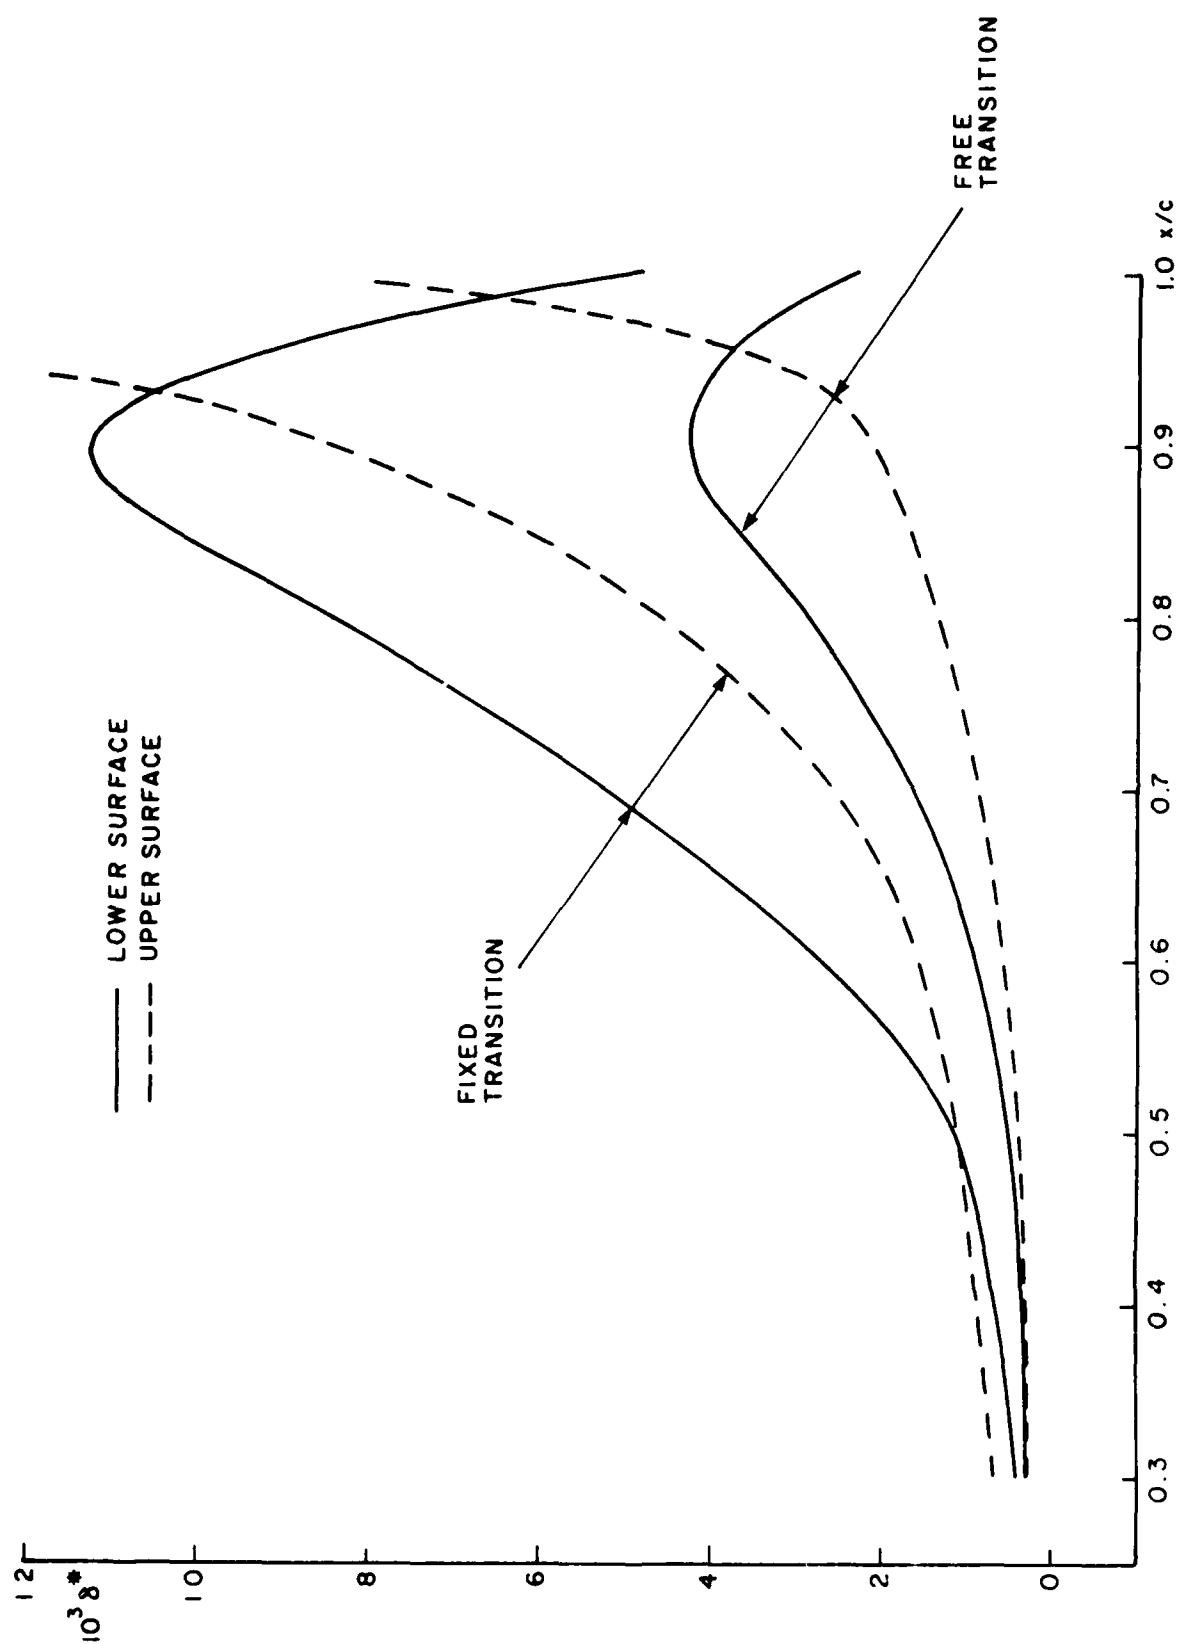
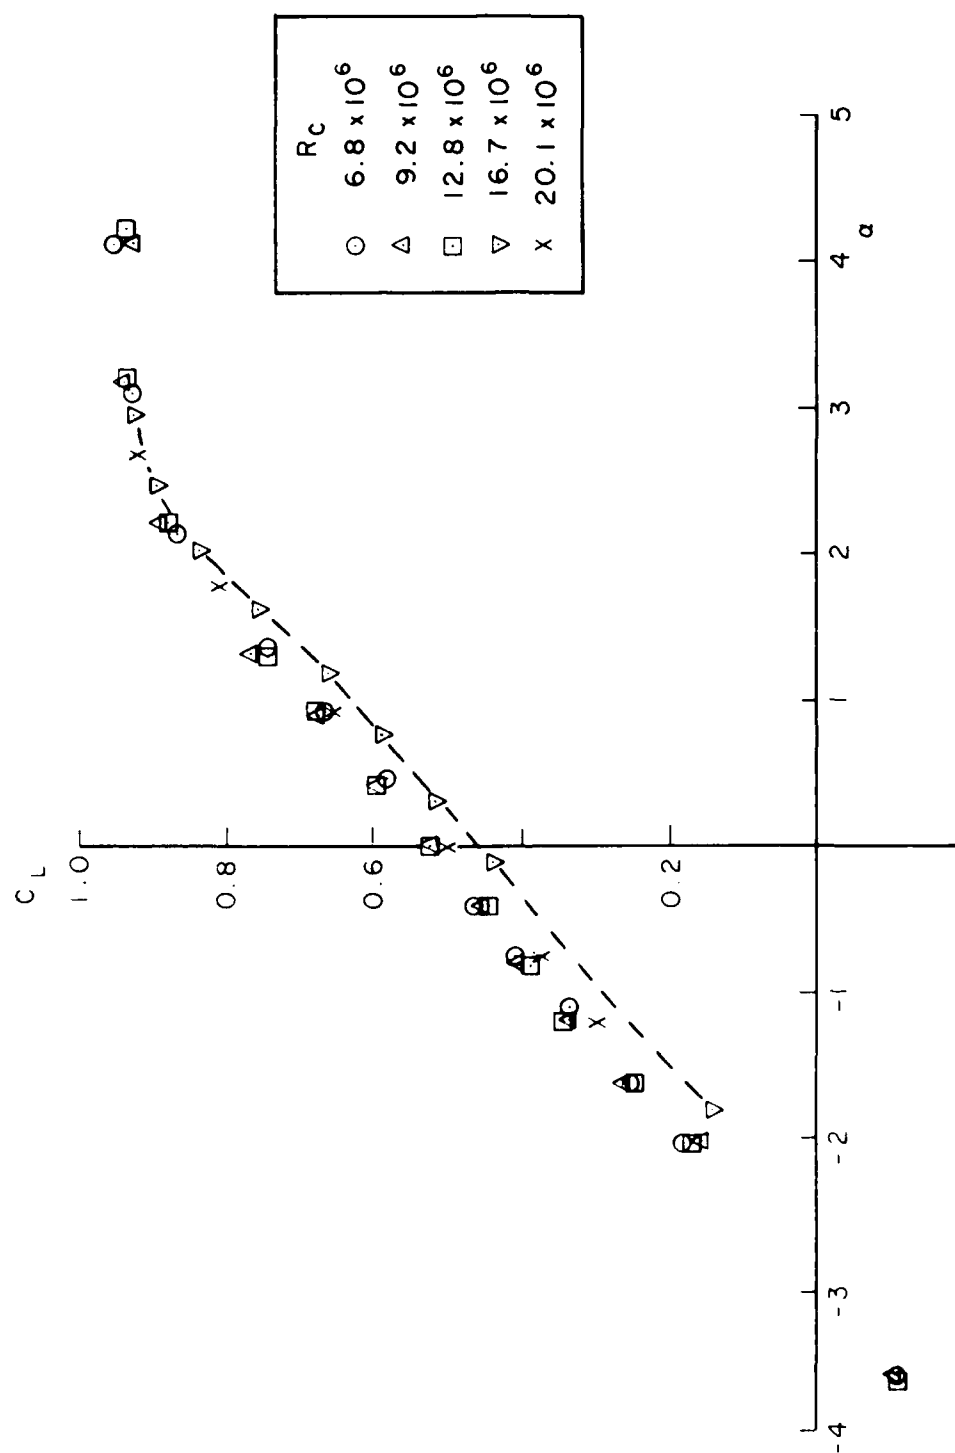


FIG. 4b: BGK CALCULATION OF  $\delta^*$  VERSUS  $x/c$ .  $M_\infty = 0.68$ ,  $R_c = 6.8 \times 10^6$ ,  $\alpha = 0^\circ$

FIG. 5a:  $C_L - \alpha$  WITH FREE TRANSITION.  $M_\infty = 0.68$

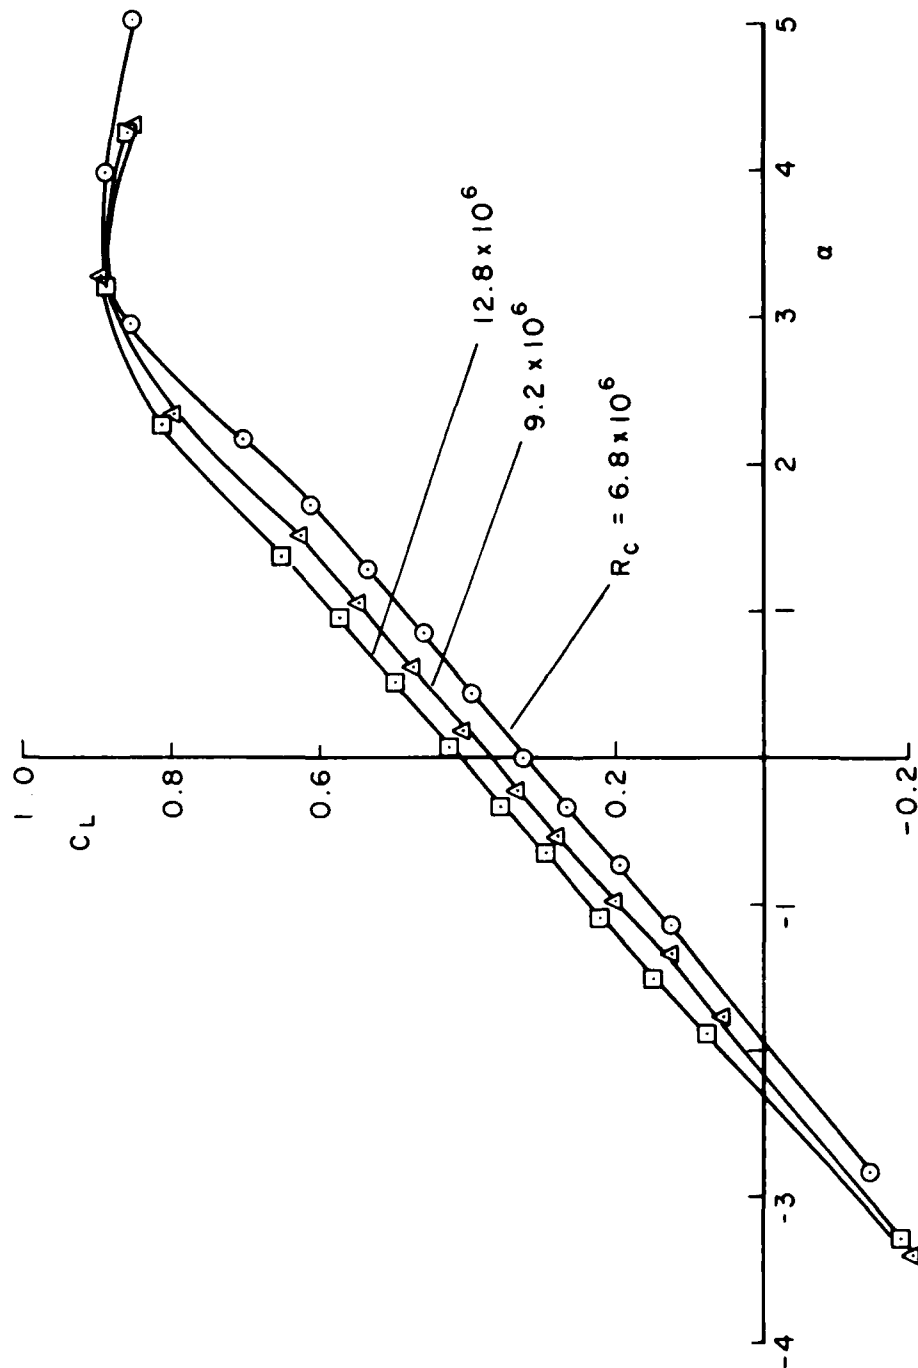
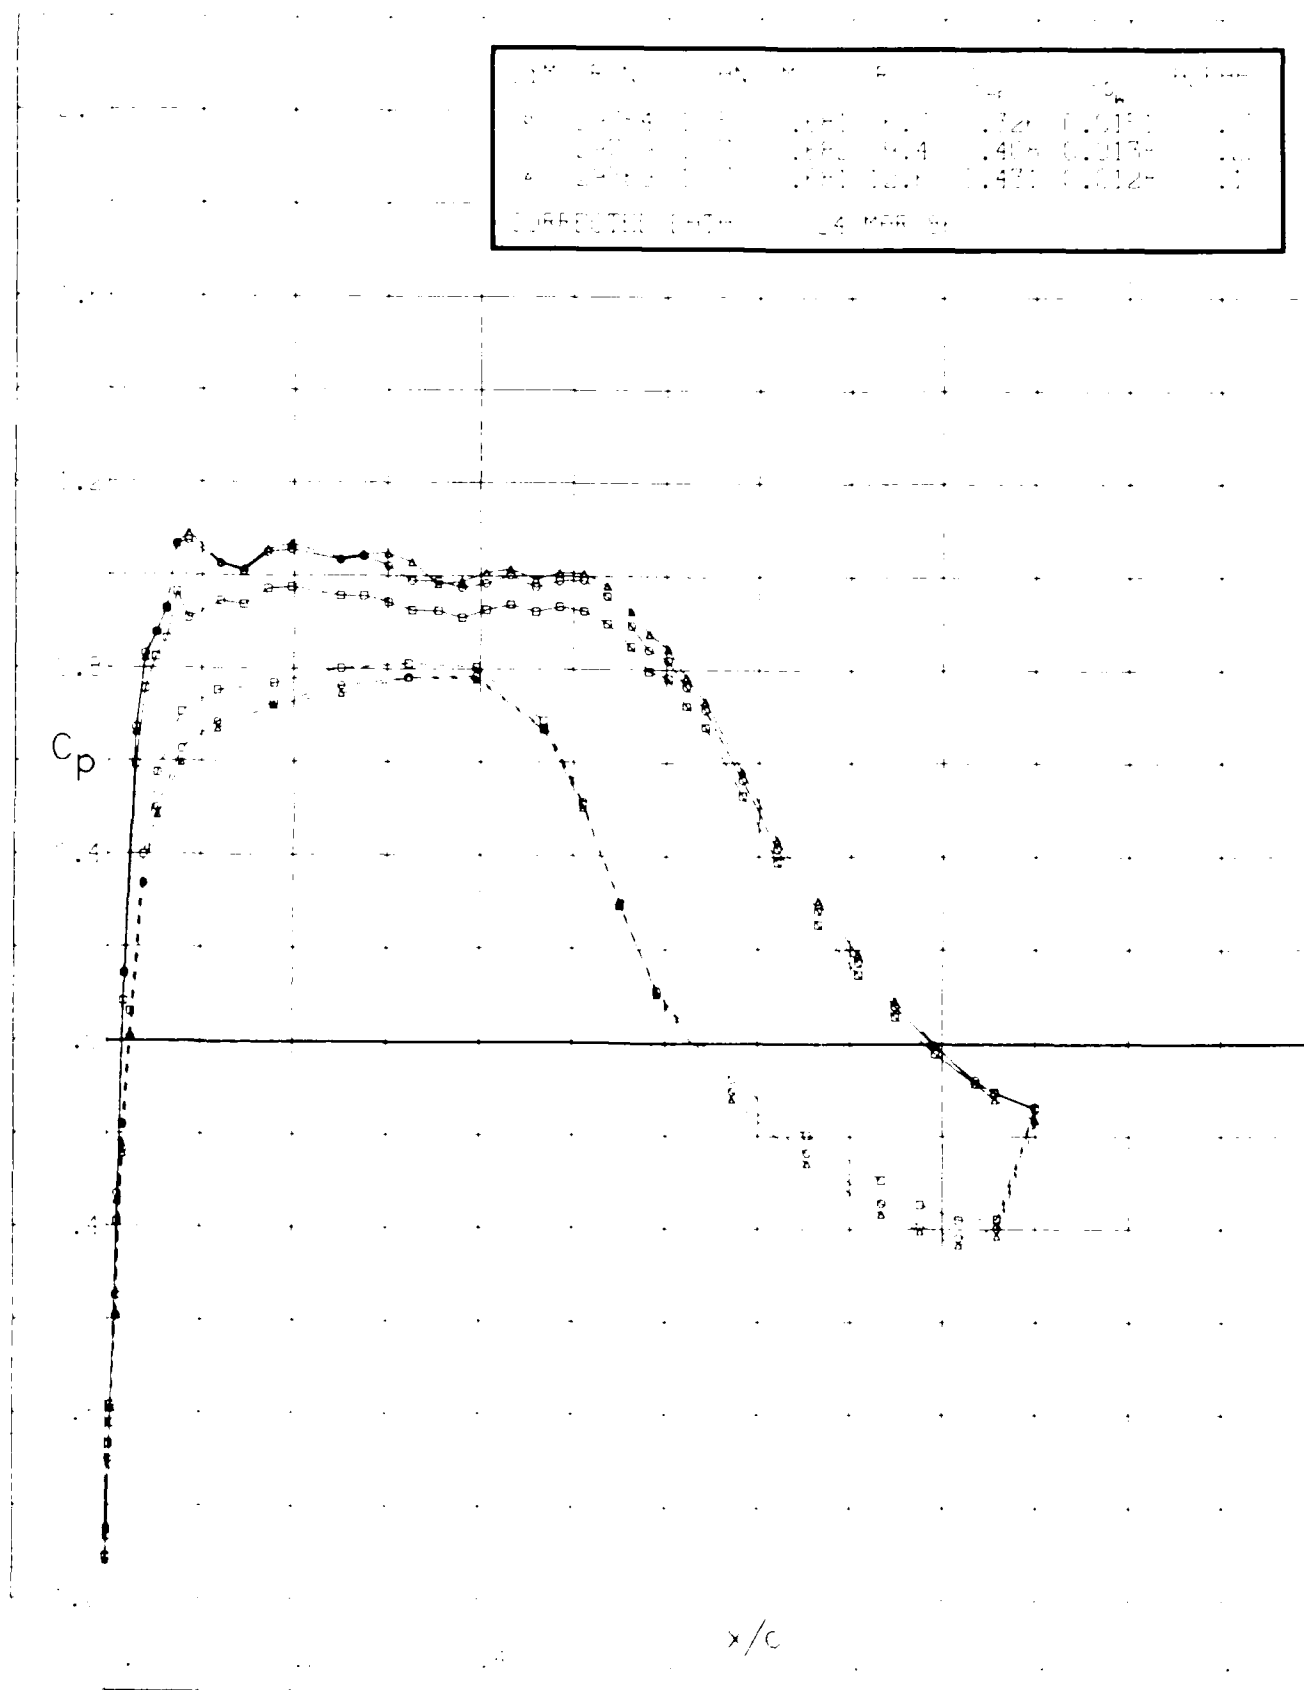


FIG. 5b:  $C_L - \alpha$  WITH FIXED TRANSITION.  $M_\infty = 0.68$

FIG. 6: EFFECT OF REYNOLDS NUMBER ON  $C_p$  WITH FIXED TRANSITION

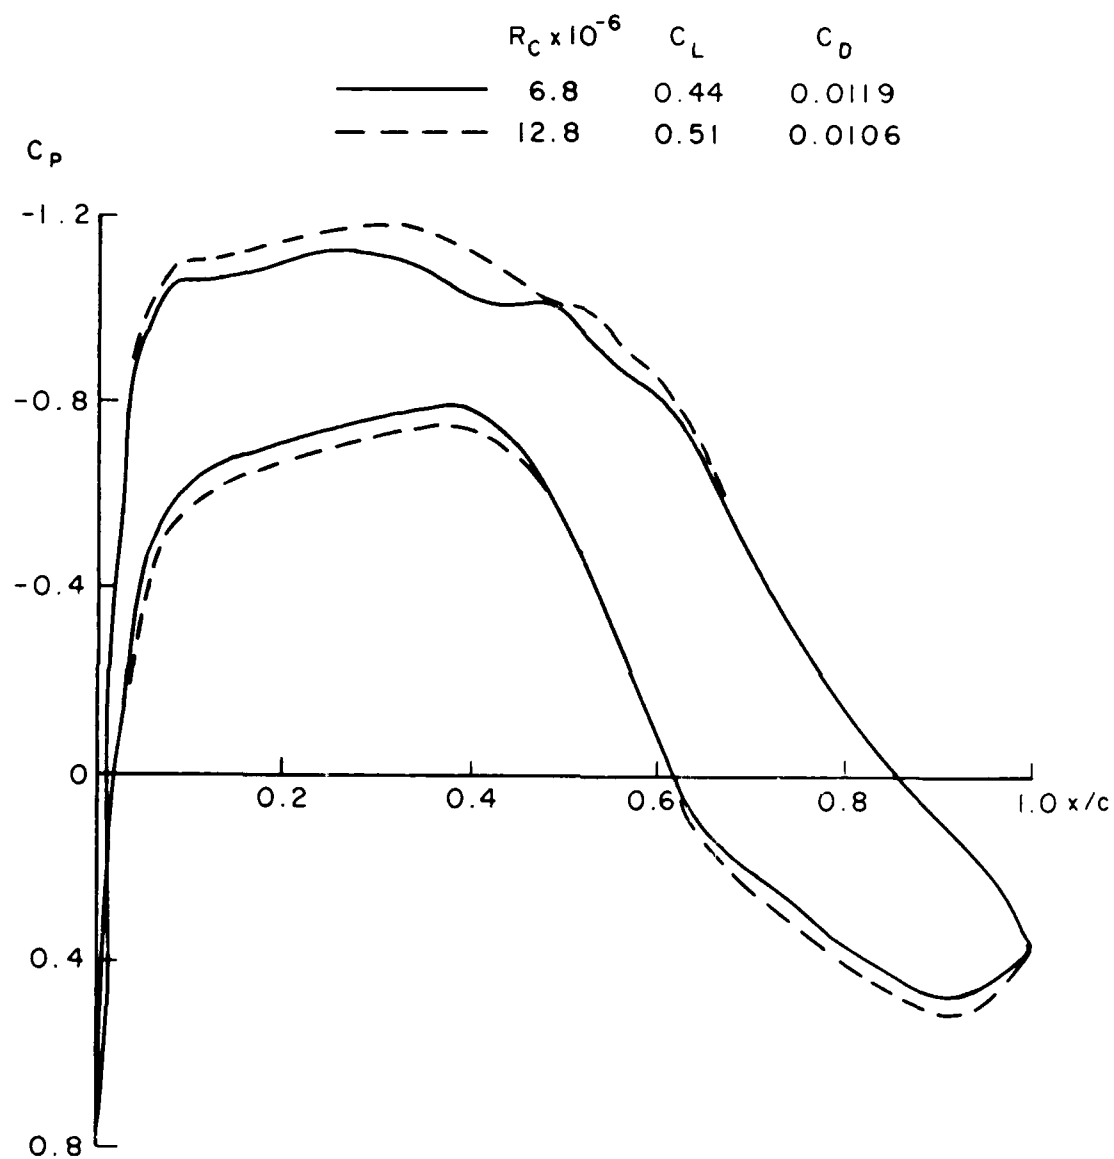


FIG. 7: BGK COMPUTATIONS TO SHOW REYNOLDS NUMBER EFFECT WHEN TRANSITION FIXED.  $M_\infty = 0.68, \alpha = 0^\circ$

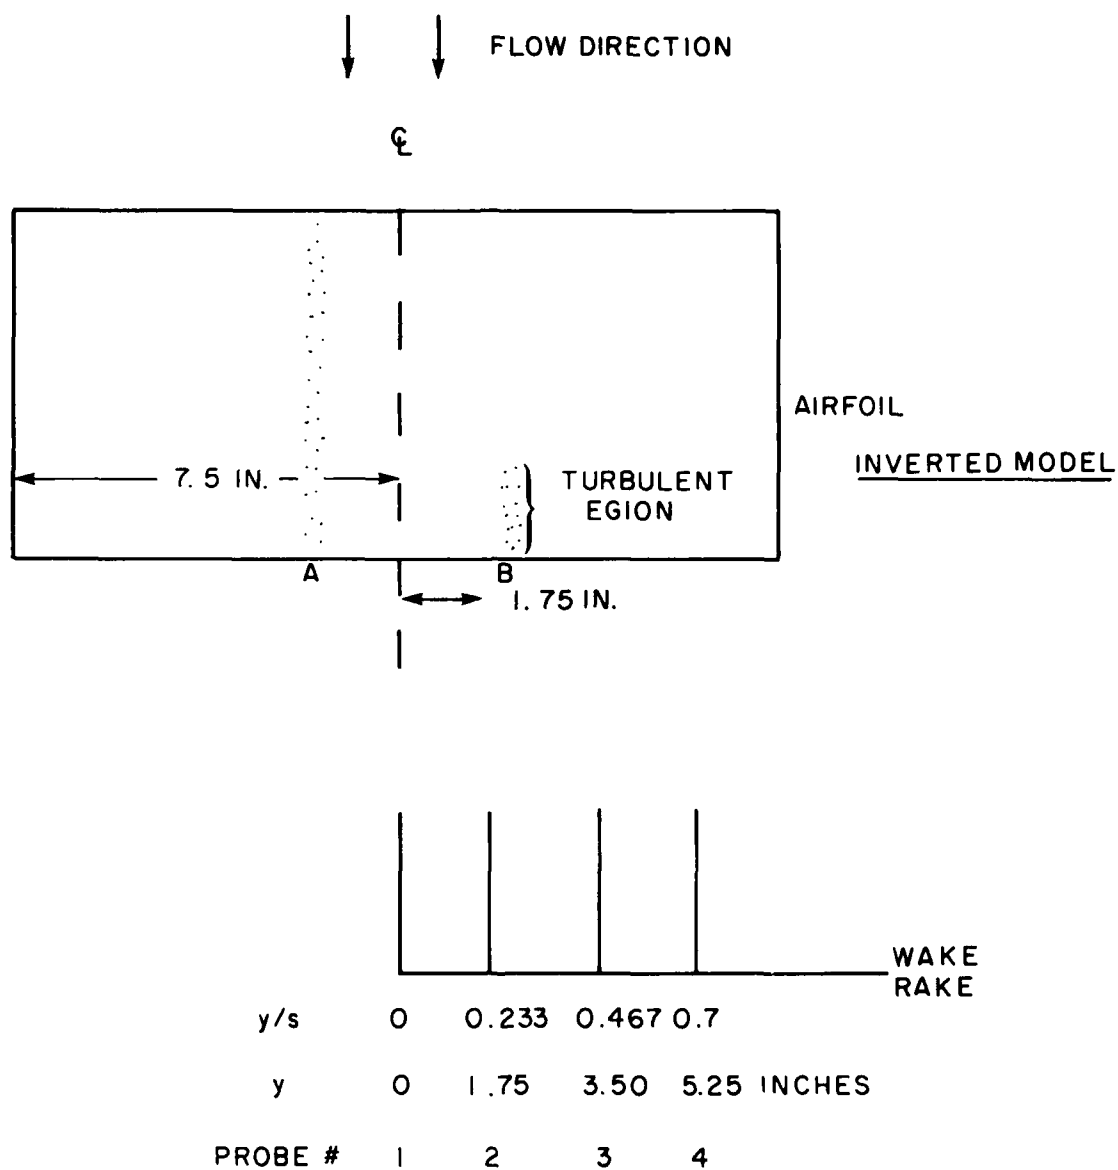


FIG. 8: THE TWO SPANWISE LOCATIONS OF PRESSURE TAPPINGS

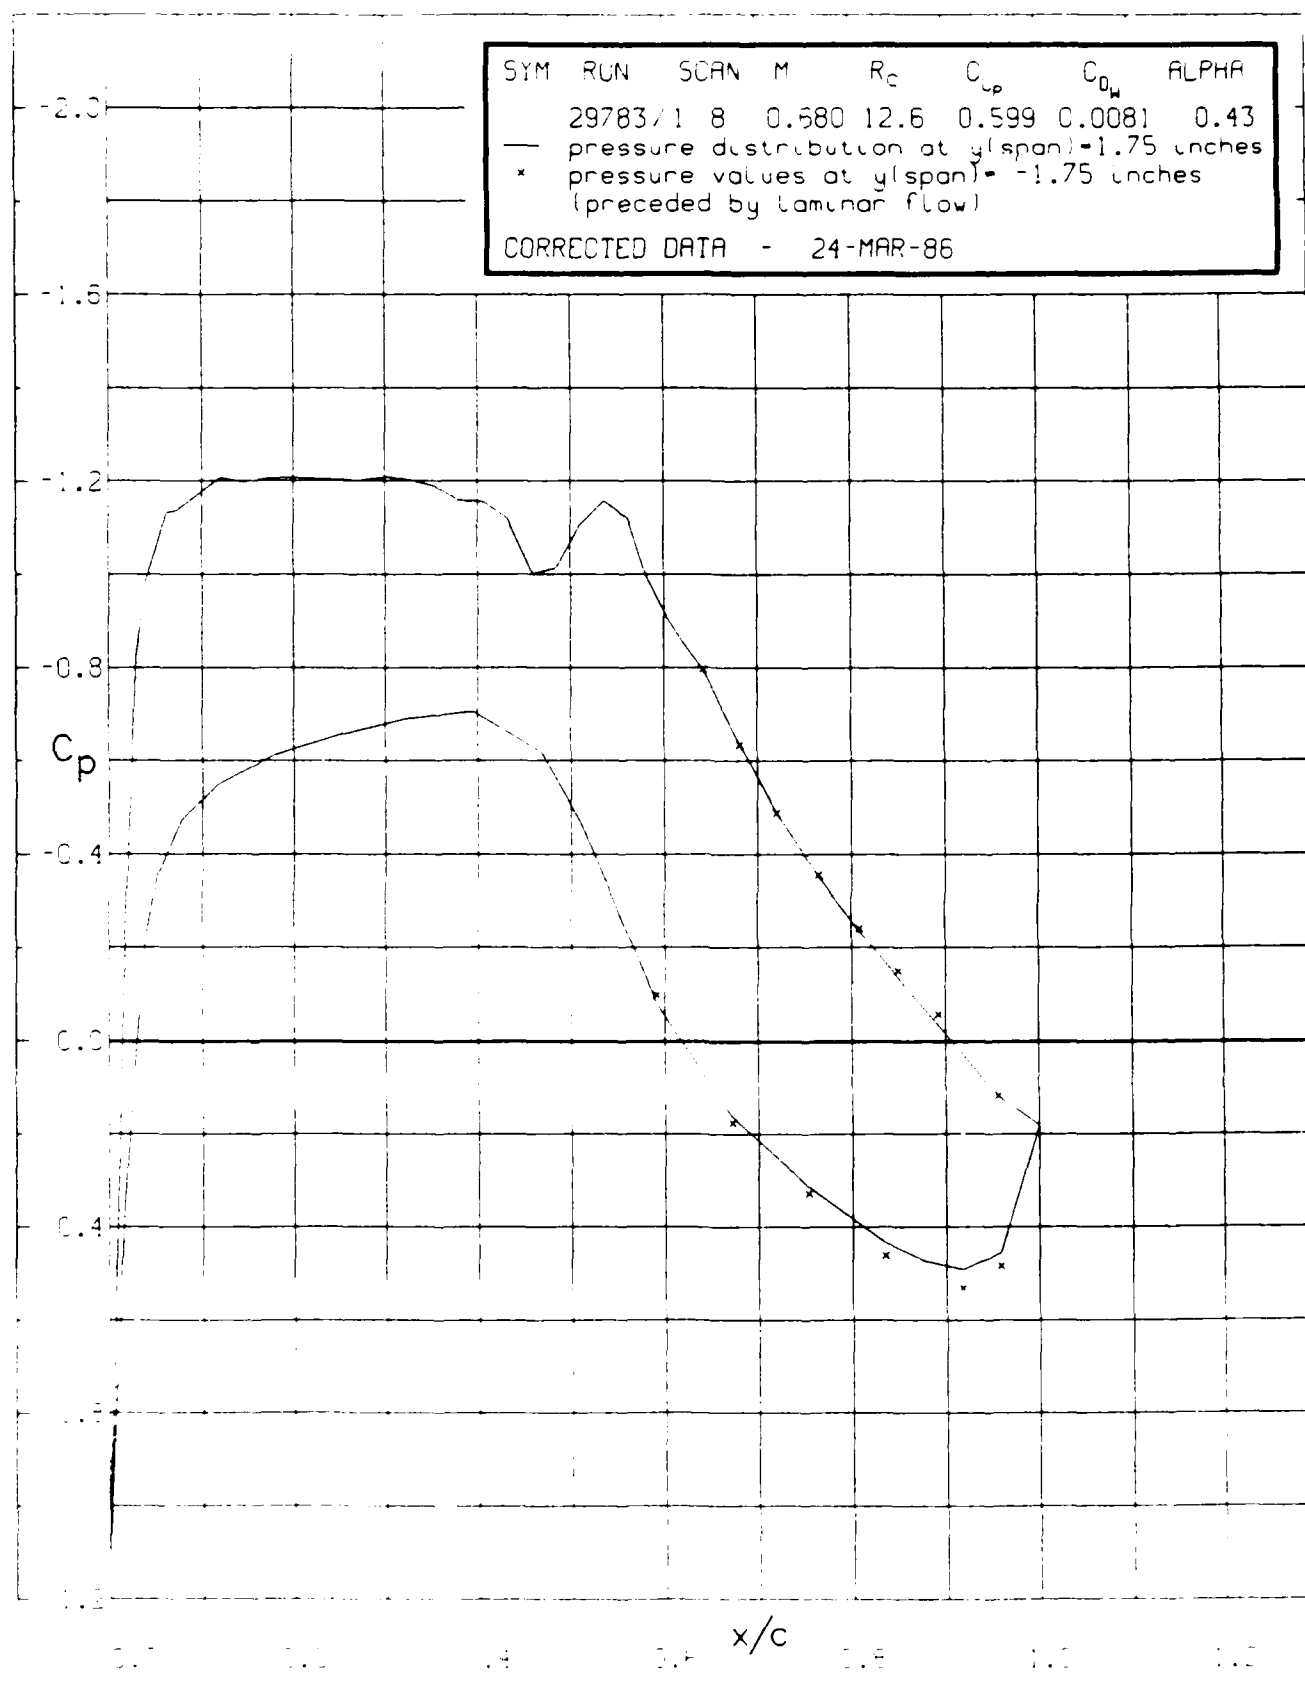


FIG. 9a: PRESSURE VARIATION AT TWO SPANWISE LOCATIONS  
 $M_\infty = 0.68$ ,  $R_c = 12.6 \times 10^6$

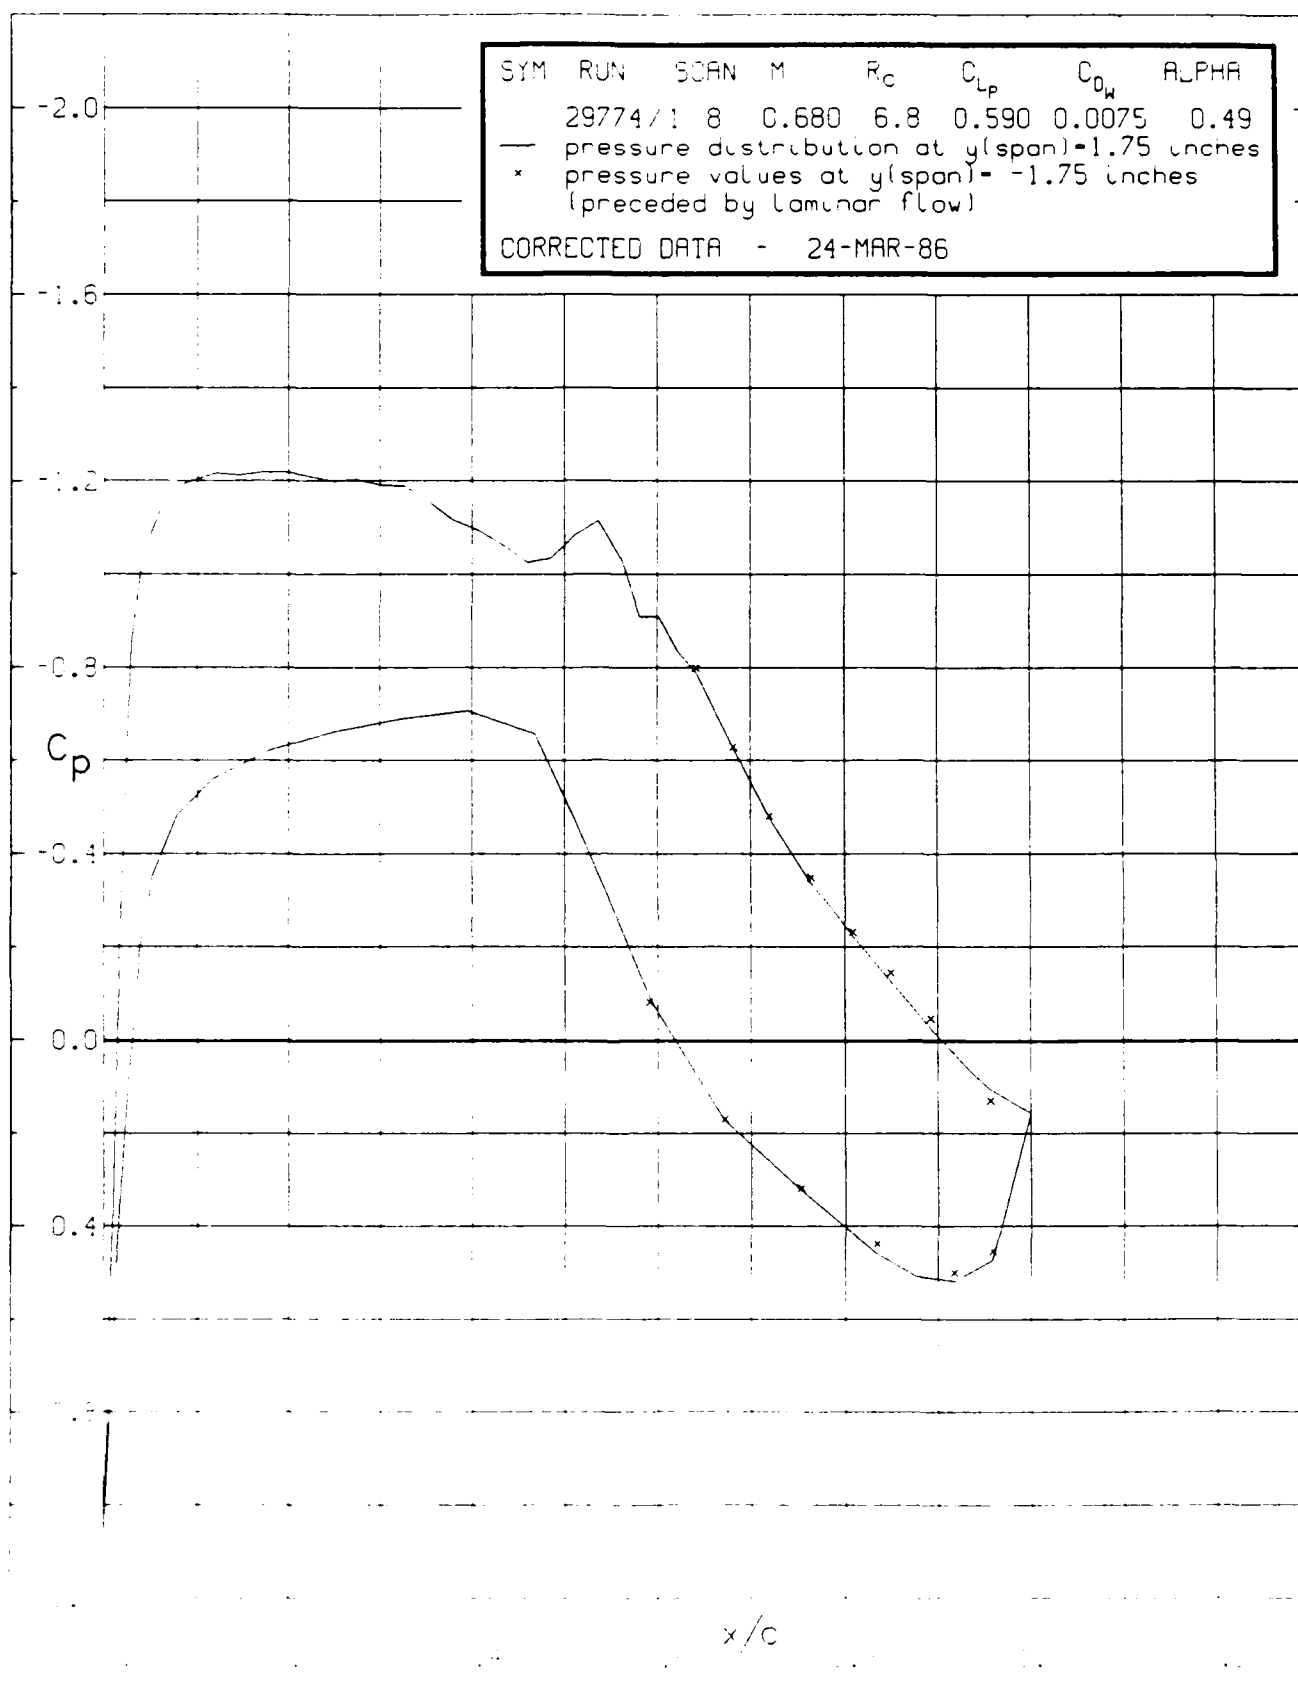


FIG. 9b: PRESSURE VARIATION AT TWO SPANWISE LOCATIONS  
 $M_\infty = 0.68, R_c = 9.3 \times 10^6$

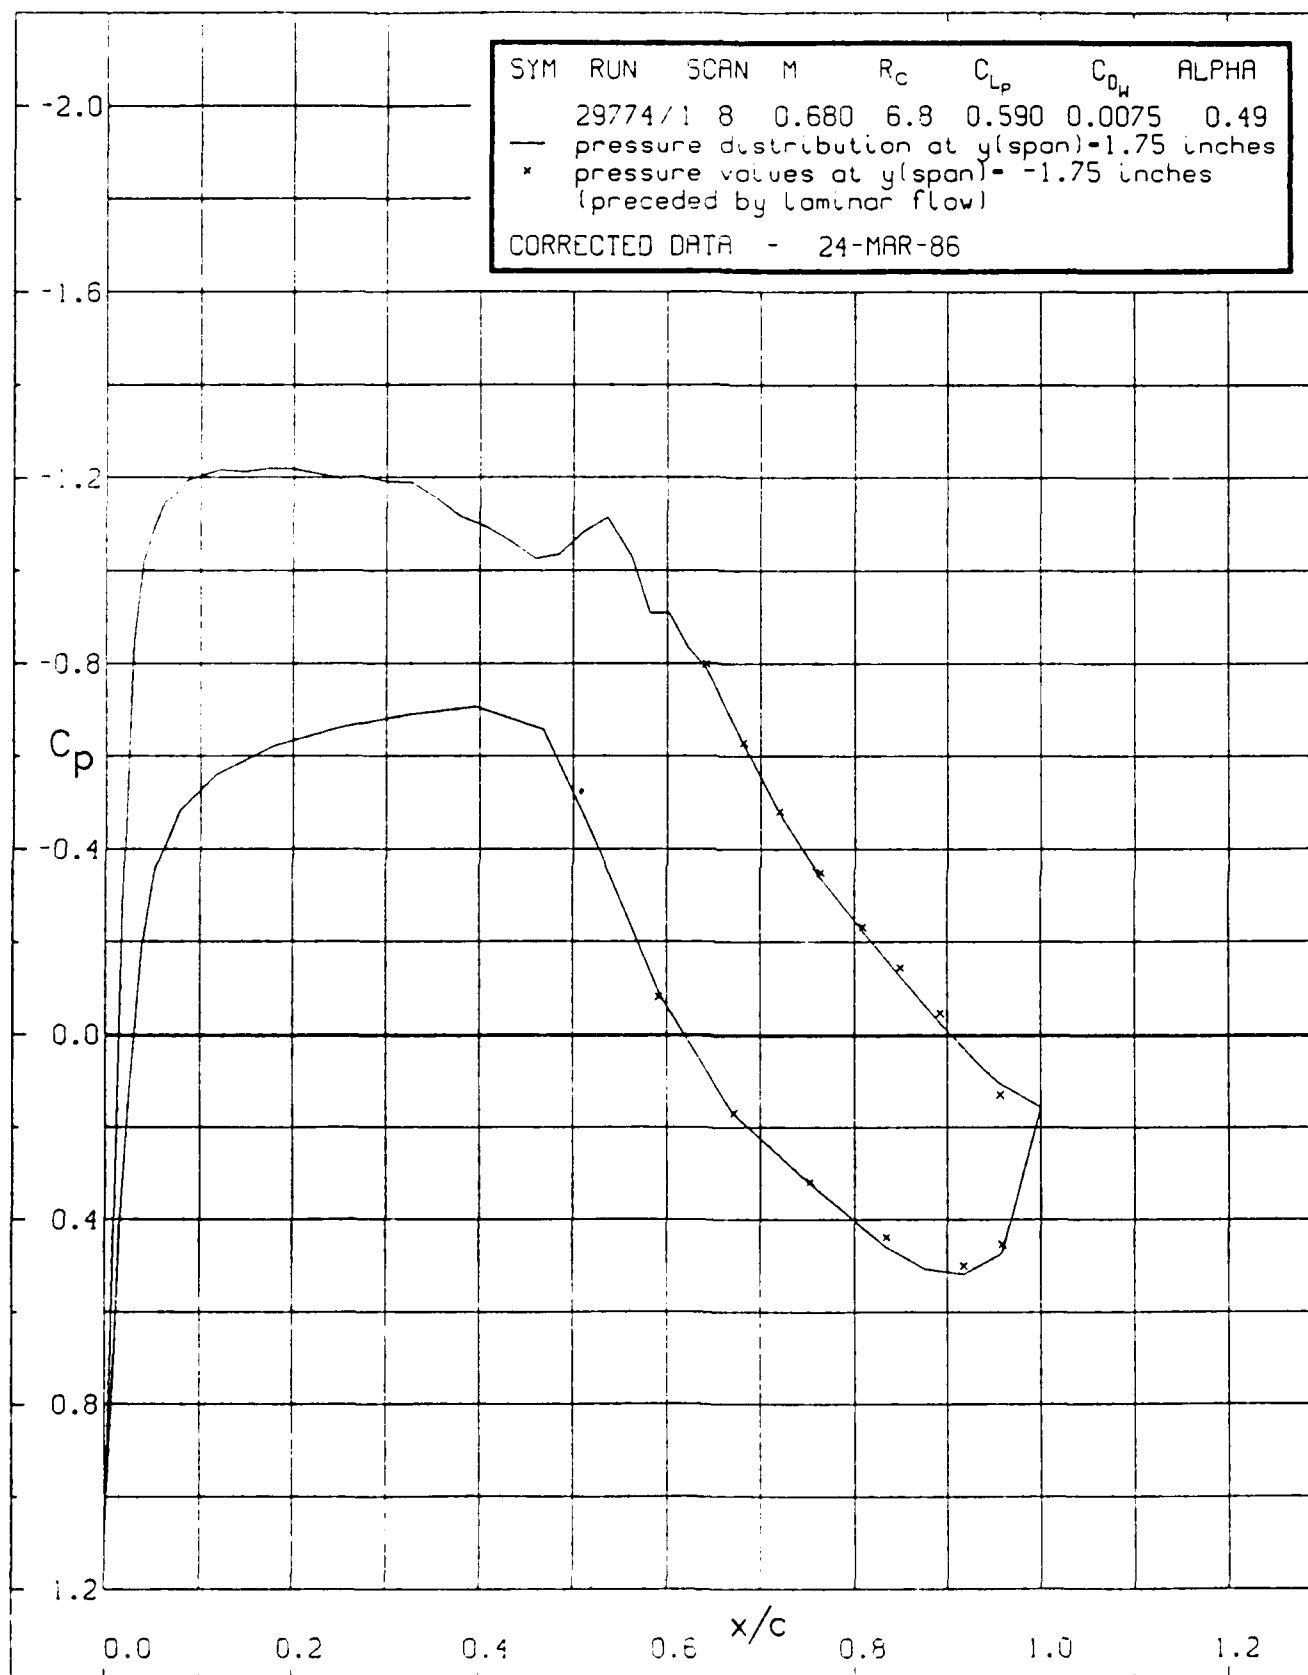


FIG. 9c: PRESSURE VARIATION AT TWO SPANWISE LOCATIONS  
 $M_\infty = 0.68, R_c = 6.8 \times 10^6$

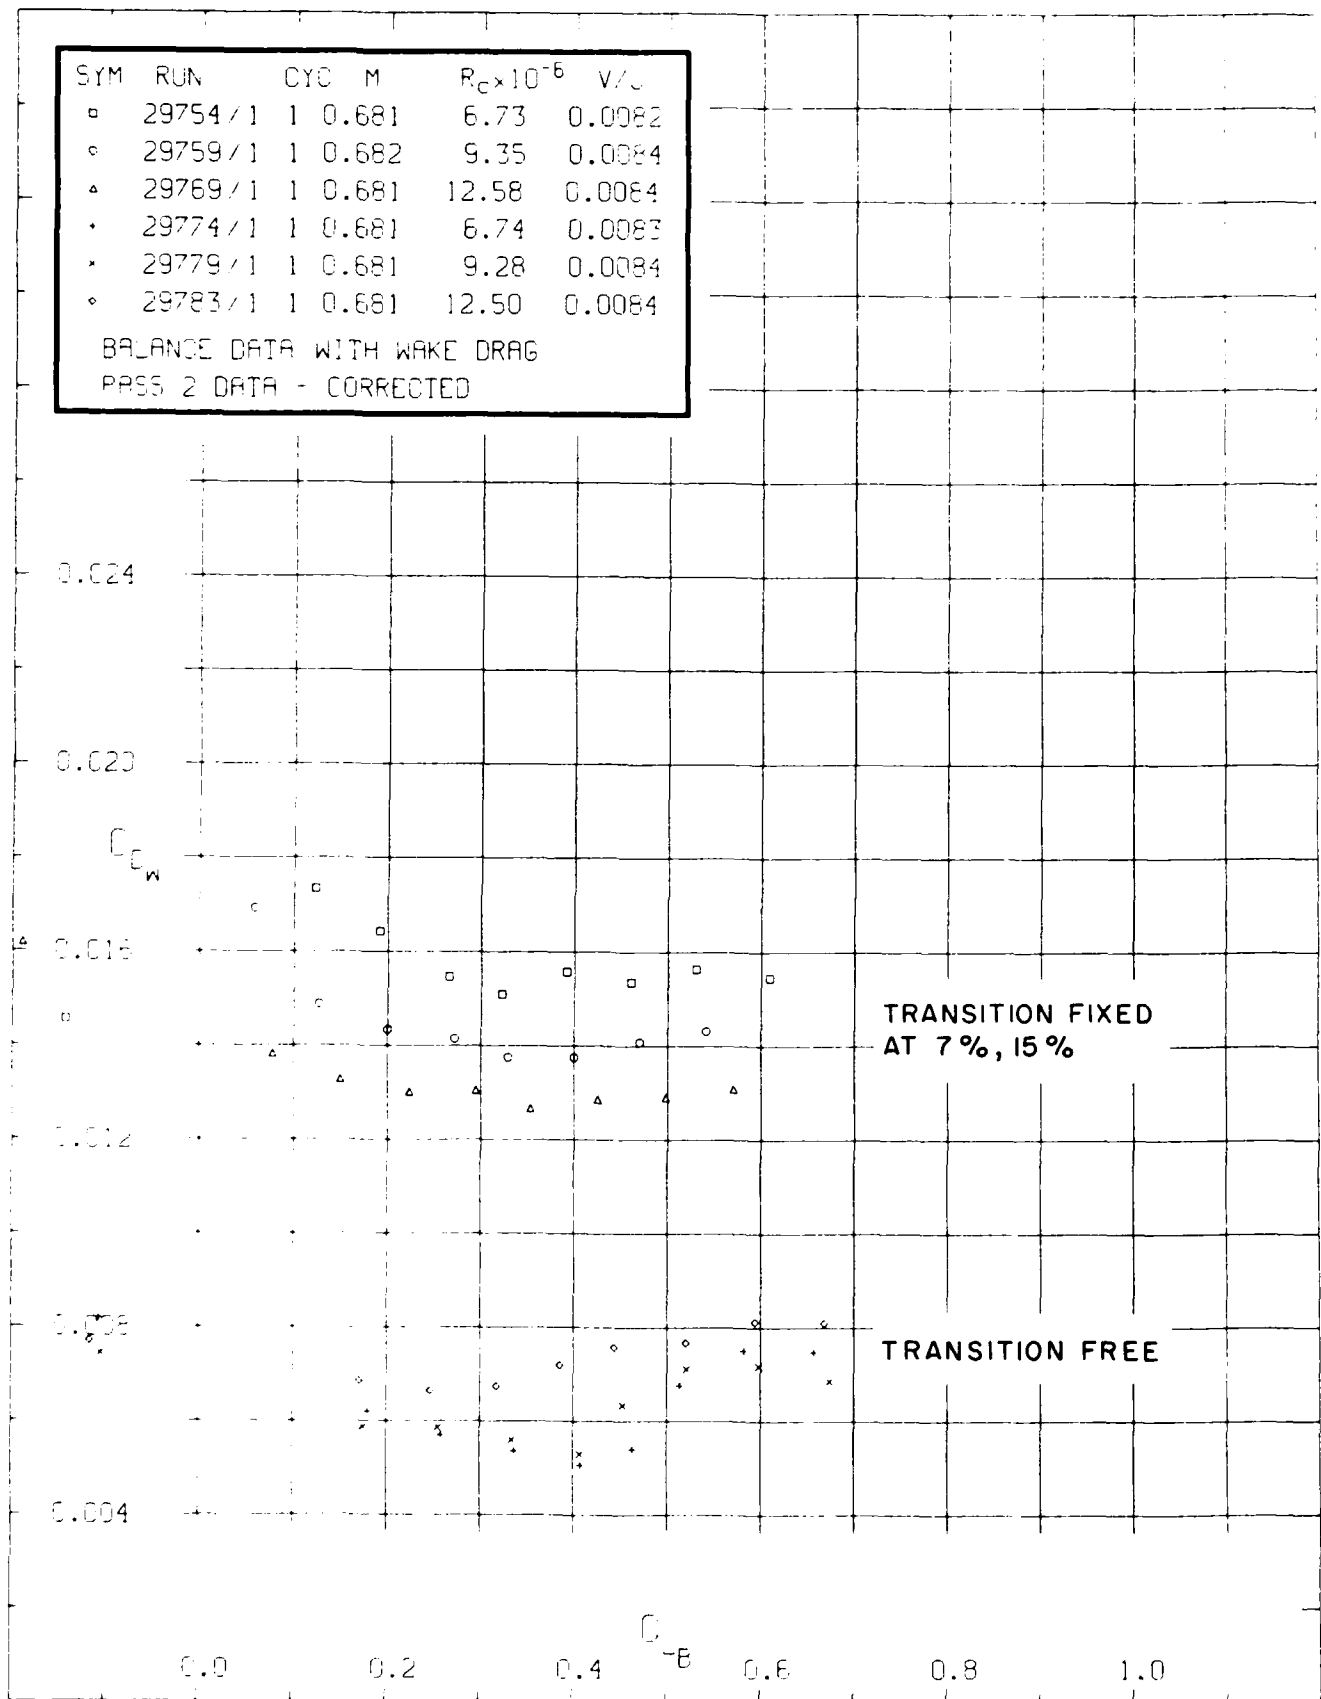


FIG. 10: EFFECT OF TRANSITION ON DRAG VALUES

LEGEND

- $\Delta$   $R_c = 6.8 \times 10^6$   
 $\odot$   $R_c = 9.2 \times 10^6$   
 $\circ$   $R_c = 12.8 \times 10^6$   
 $\nabla$   $R_c = 16.7 \times 10^6$   
 $\oplus$   $R_c = 20.1 \times 10^6$



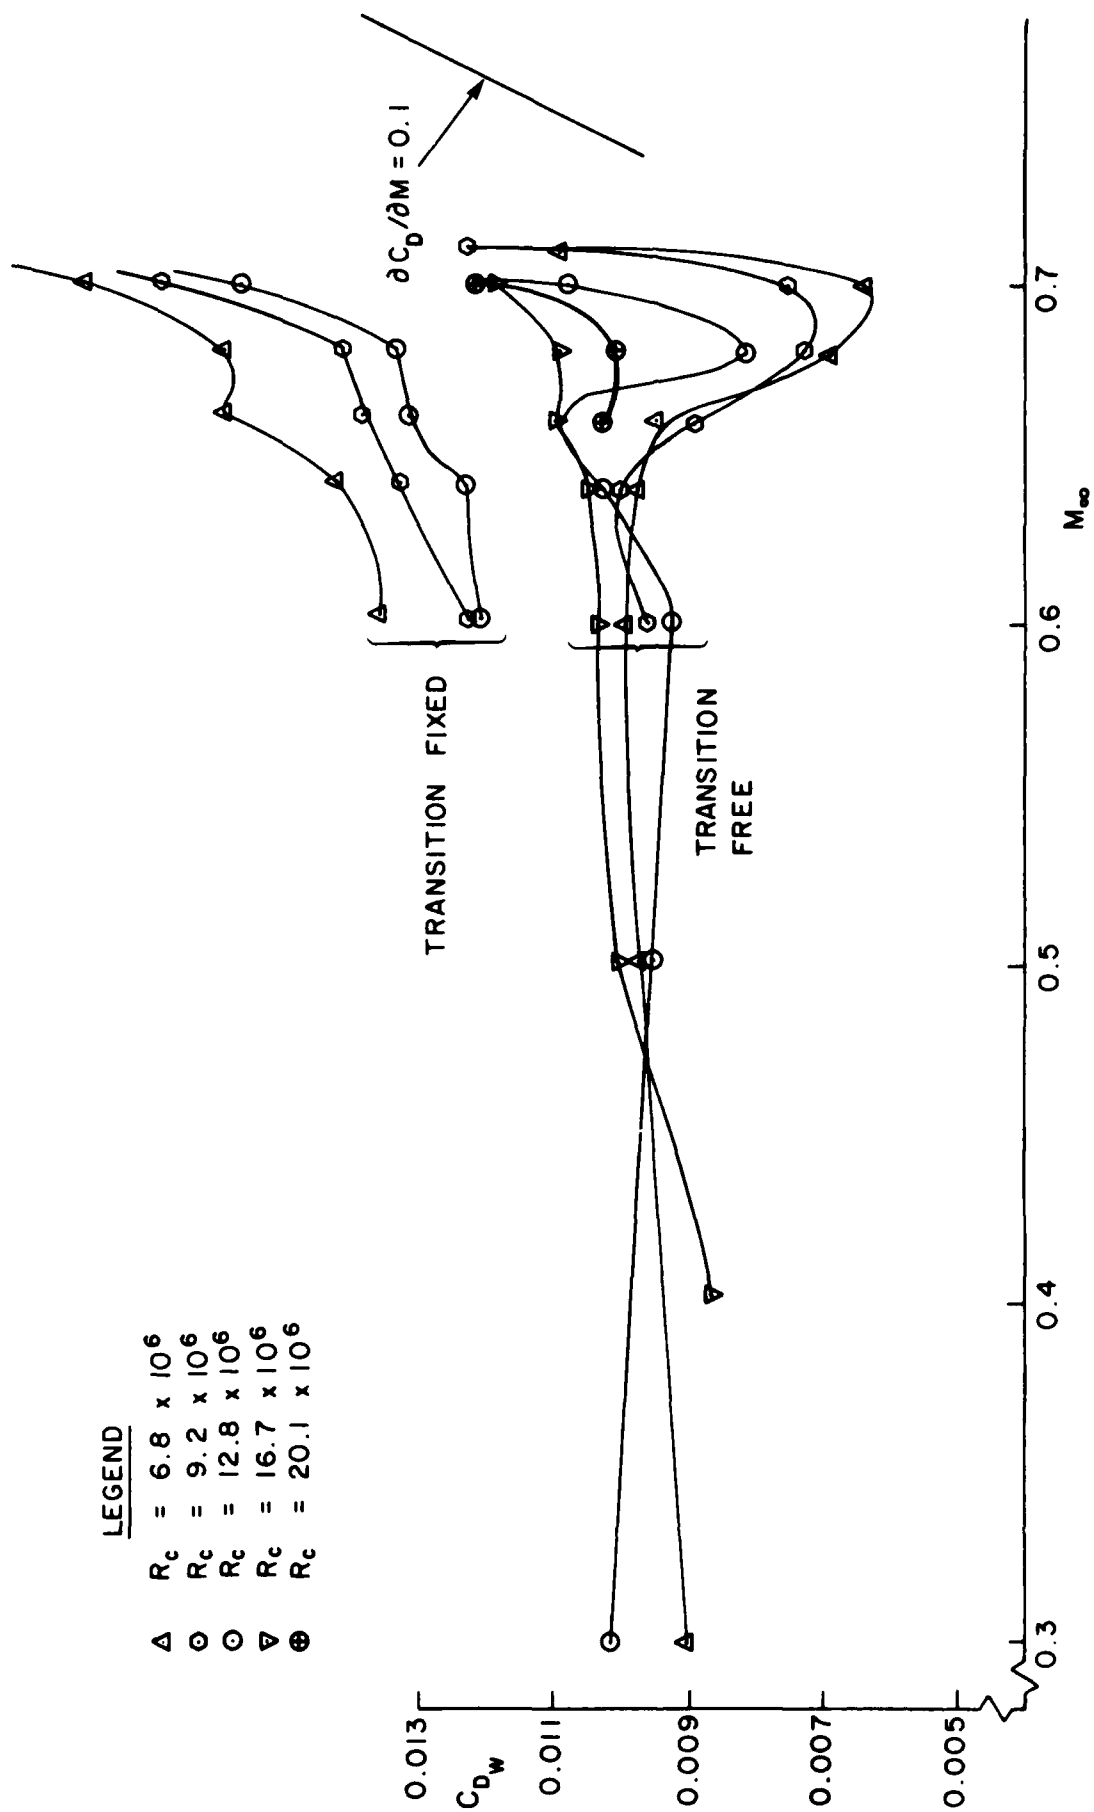


FIG. 11a:  $C_{Dw}$  VERSUS  $M_\infty$  FOR  $C_L = 0.6$

FIG. 11b:  $C_{Dw}$  VERSUS  $M_\infty$  FOR  $C_L = 0.7$

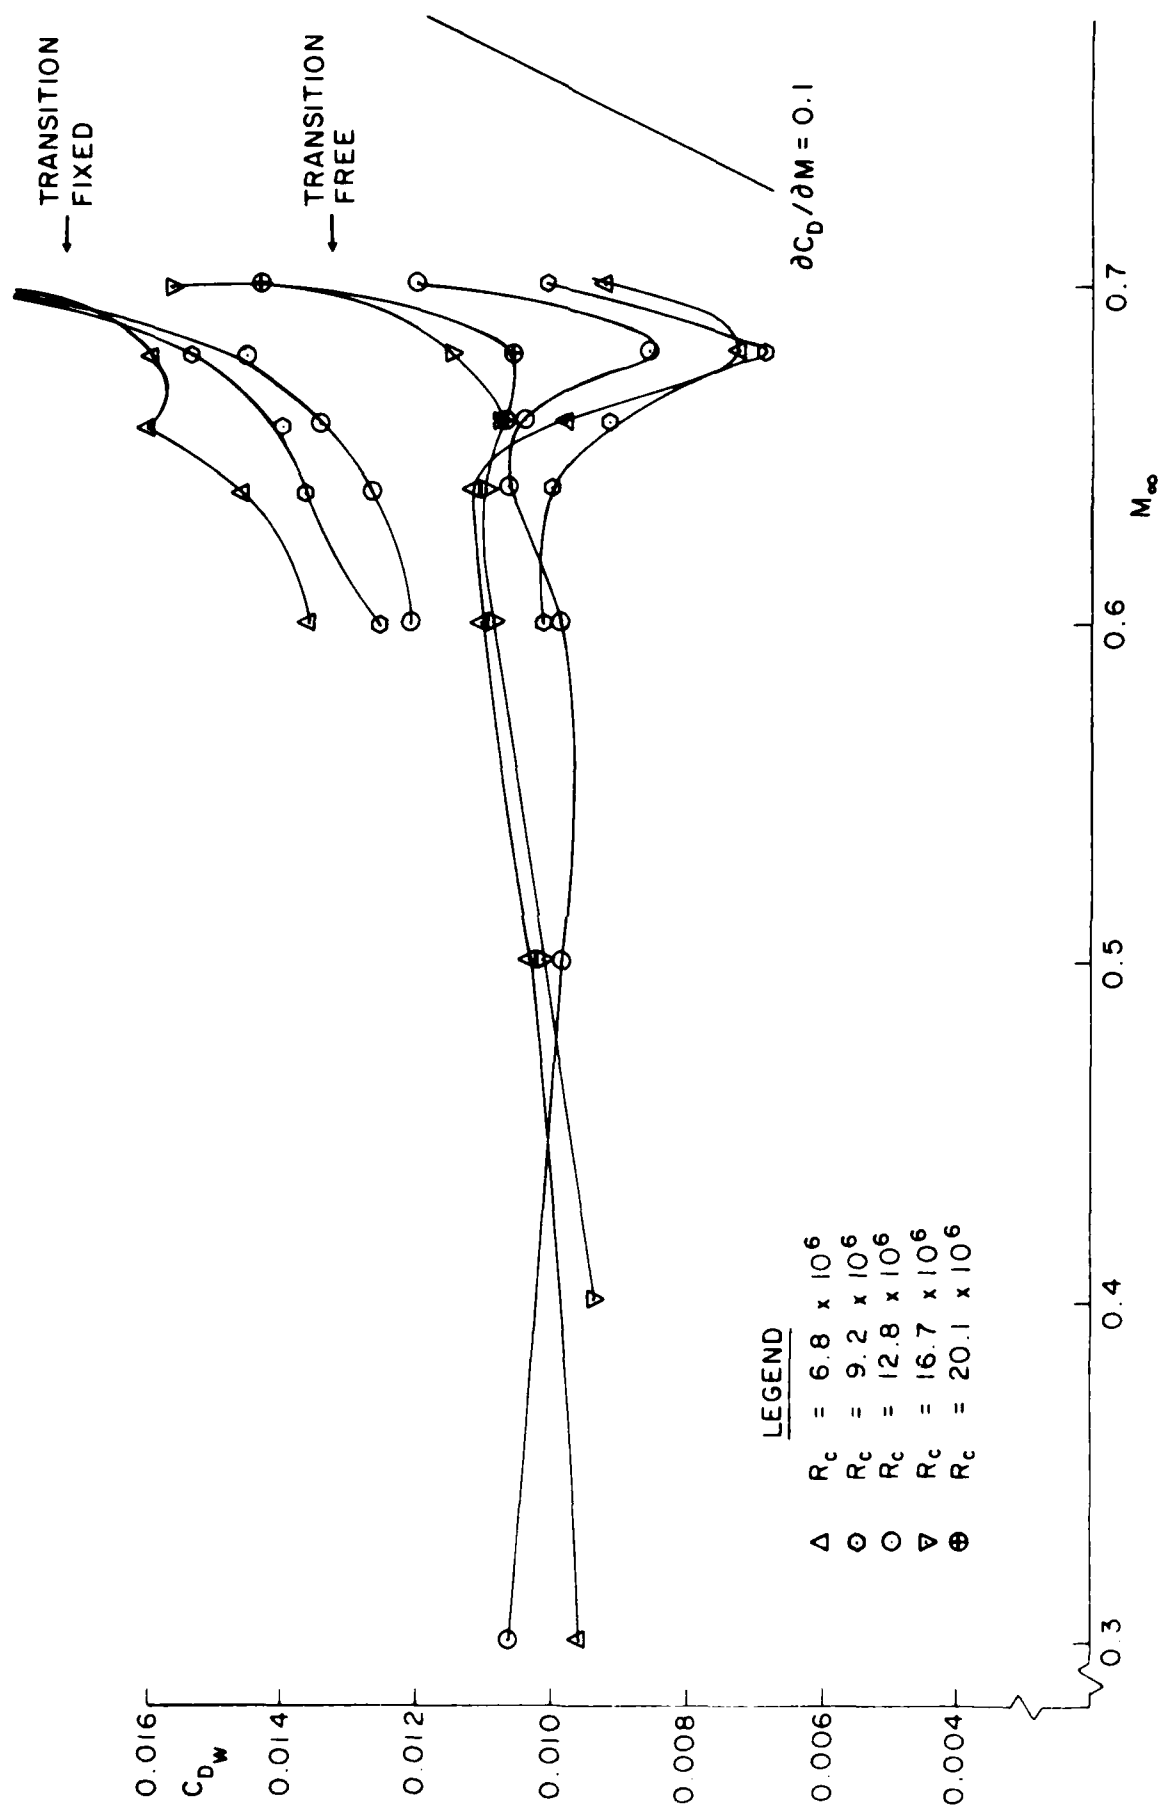

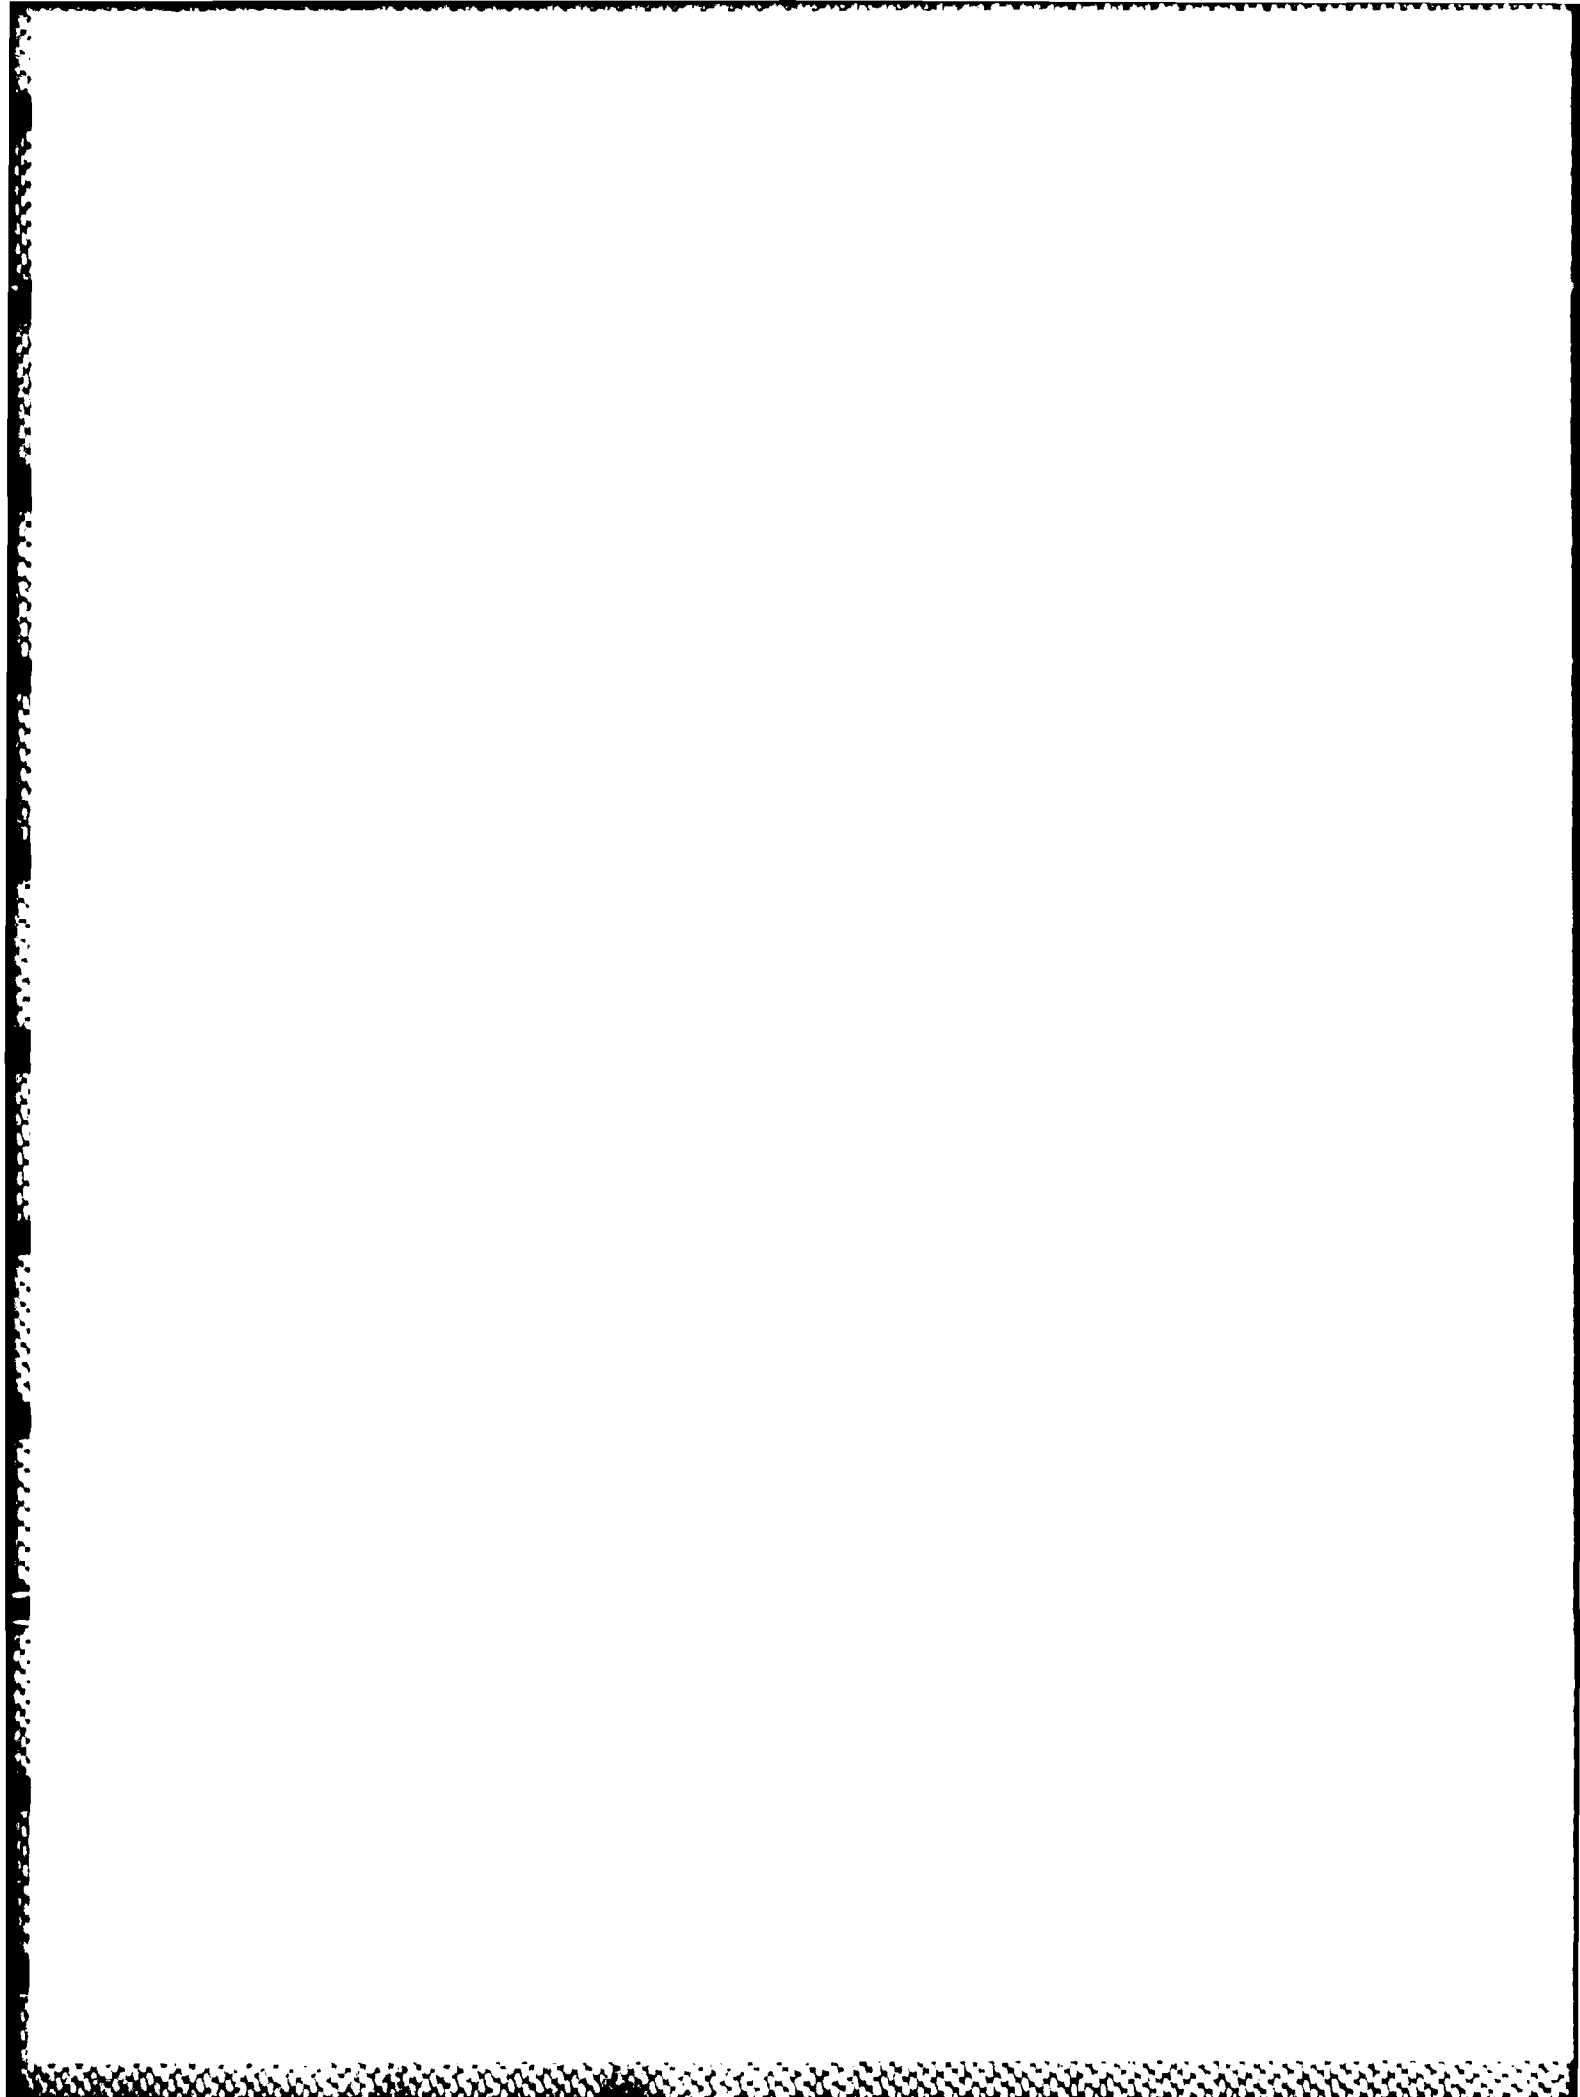

# REPORT DOCUMENTATION PAGE / PAGE DE DOCUMENTATION DE RAPPORT

REPORT/RAPPORT  NAE-AN-41 1a		REPORT/RAPPORT  NRC No. 26453 1b		
REPORT SECURITY CLASSIFICATION CLASSIFICATION DE SÉCURITÉ DE RAPPORT  UNCLASSIFIED 2		DISTRIBUTION (LIMITATIONS)  UNLIMITED 3		
TITLE/SUBTITLE/TITRE/SOUS-TITRE  Further Studies on the 21% Thick, Supercritical NLF Airfoil NAE 68-060-21:1 4				
AUTHOR(S)/AUTEUR(S)  M. Khalid, D.J. Jones 5				
SERIES/SÉRIE  Aeronautical Note 6				
CORPORATE AUTHOR/PERFORMING AGENCY/AUTEUR D'ENTREPRISE/AGENCE D'EXÉCUTION  7				
SPONSORING AGENCY/AGENCE DE SUBVENTION  National Research Council Canada National Aeronautical Establishment High Speed Aerodynamics Laboratory 8				
DATE  86-09 9	FILE/DOSSIER  10	LAB. ORDER COMMANDE DU LAB.  11	PAGES  32 12a	FIGS/DIAGRAMMES  12 12b
NOTES  13				
DESCRIPTORS (KEY WORDS)/MOTS-CLÉS  1. Aerofoils (supersonic) 2. Aerofoils - drag 3. Aerofoils - Reynolds number effects 4. Aerofoils - test results 14				
SUMMARY/SOMMAIRE  Further wind tunnel tests have been carried out on the NAE 10" chord supercritical NLF airfoil NAE 68-060-21:1. This airfoil in previous tests showed very low drag levels when free transition was allowed on the model. In the main part of the current investigation, performed at chord Reynolds number of about 7.9 and 13 million, transition was fixed at 7% and 15% on upper and lower surfaces respectively. It is observed that there is a substantial loss of lift under these conditions which appears to be associated with boundary layer thickening on the lower surface causing decambering near the trailing edge.  Also additional tests were carried out under free transition at other Reynolds numbers than those previously used. The same drag bucket behaviour near the design flow conditions was observed.  15				

END

2-87

DTIC